

Sanitary Centrifugal Pumps

W+ SERIES - 50HZ CURVE BOOK



TABLE OF CONTENTS

W+ 10/8 Model.....	3
W+ 22/20 Model – Low Flow Impeller.....	4-5
W+ 22/20 Model.....	6-7
W+ 25/210 Model.....	8
W+ 30/80 Model.....	9-10
W+ 30/120 Model.....	11-12
W+ 35/35 Model – Low Flow Impeller.....	13-14
W+ 35/35 Model.....	15-16
W+ 35/55 Model.....	17-18
W+ 50/8 Model.....	19-20
W+ 55/35 Model.....	21-22
W+ 55/60 Model.....	23-24
W+ 60/110 Model.....	25-26
W+ 65/350 Model.....	27-28
W+ 70/40 Model.....	29-30
W+ 80/80 Model.....	31-32
W+ 110/130 Model.....	33-34
W+ 140/50 Model.....	35-36

SPX FLOW, Inc. (NYSE:FLOW) is a leading manufacturer of innovative flow technologies, many of which help define the industry standard in the market segments they serve. From its headquarters in Charlotte, North Carolina, it operates a sales and support network, centers of manufacturing excellence, and advanced engineering facilities, throughout the world. Its cutting-edge flow components and process equipment portfolio includes a wide range of pumps, valves, heat exchangers, mixers, homogenizers, separators, filters, UHT, and drying technology that meet many application needs. Its expert engineering capability also makes it a premium supplier of customized solutions and complete, turn-key packages to meet the most exacting of installation demands.

Incorporating many leading brands, SPX FLOW has a long history of serving the food and beverage, power and energy, and industrial market sectors. Its designs and engineered solutions help customers drive efficiency and productivity, increase quality and reliability, and meet the latest regulatory demands. In-depth understanding of applications and processes, state-of-the-art Innovation Centers, and advanced pilot/testing technology further assist in optimizing processes and reducing timescales to reliably meet production targets.


To learn more about SPX FLOW capabilities, its latest technology innovations and complete service offerings, please visit www.spxflow.com.



W+ SERIES MODEL W+10/8 CENTRIFUGAL PUMP CAPACITY CURVE
1.5" INLET - 1" OUTLET, 2900 RPM, 50 Hz

NOTE: _____

Impeller dia: Max: 4.3"
Performance data refer to water at 68°F
Provisional


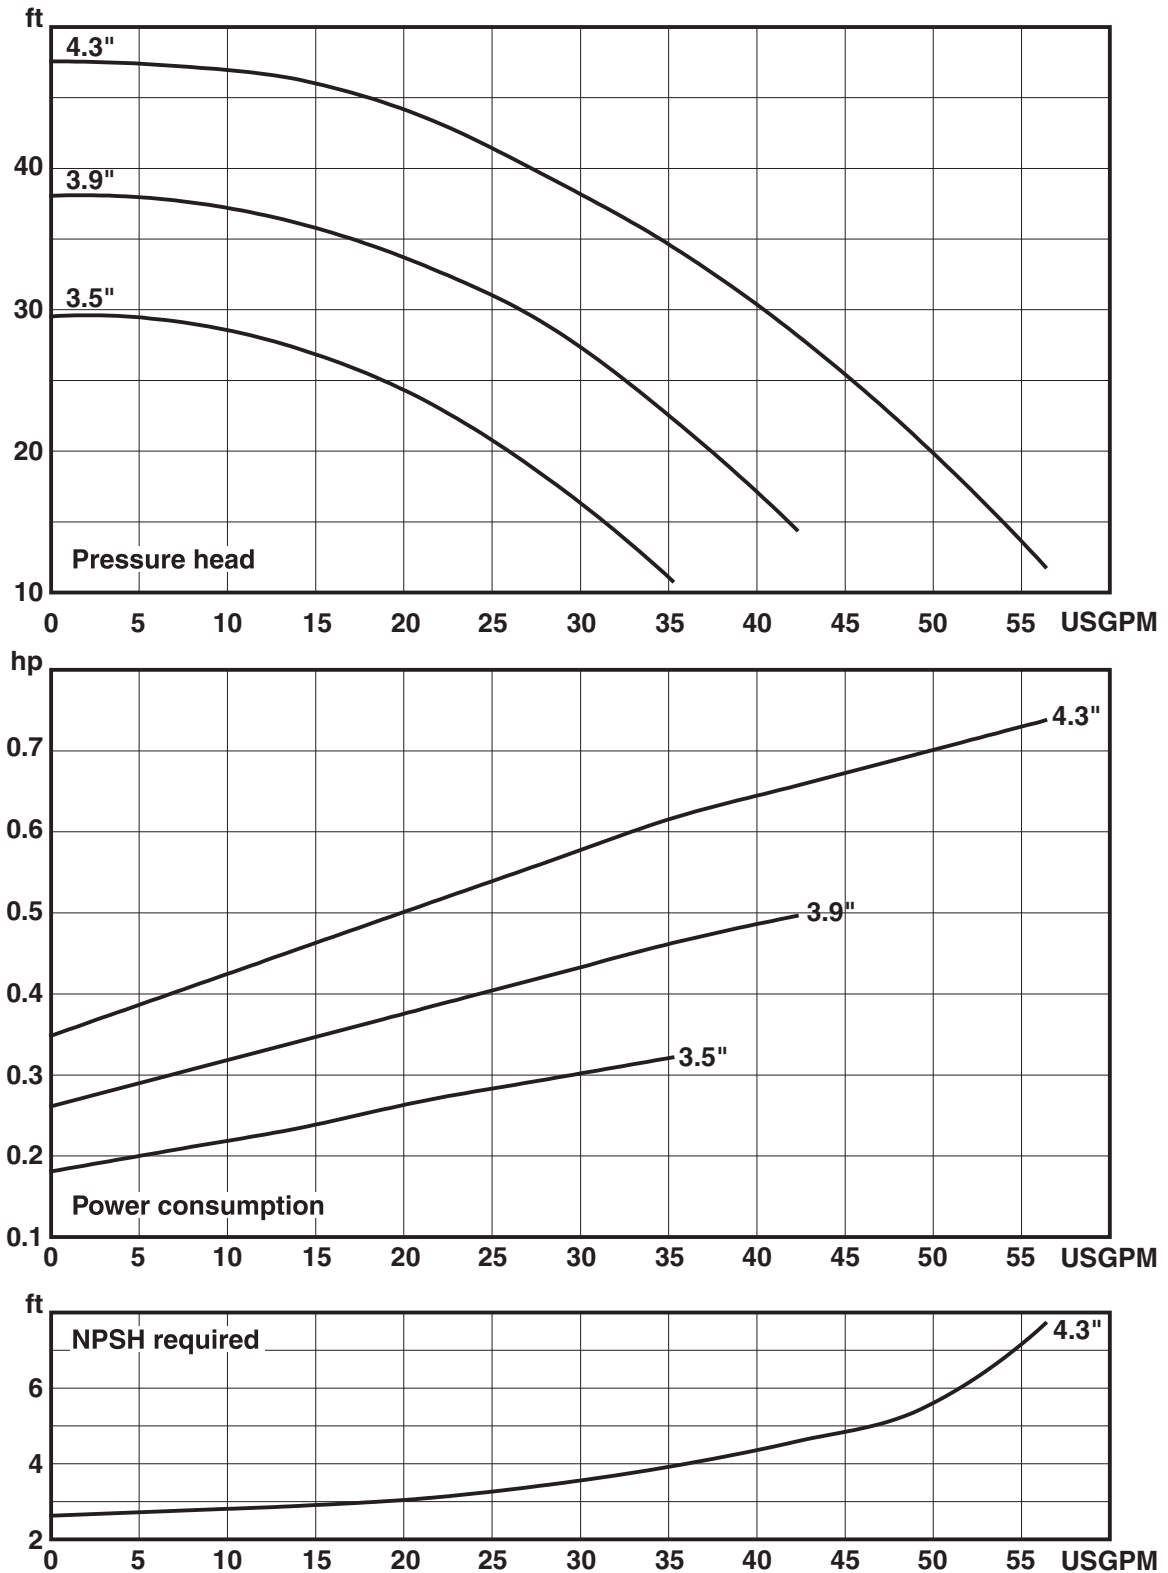




W+ SERIES MODEL W+22/20 CENTRIFUGAL PUMP CAPACITY CURVE
2" INLET - 2" OUTLET, 1450 RPM, 50 Hz

NOTE: _____

Impeller dia: Max: 5.6" - Low Flow Impeller
Performance data refer to water at 68°F
Provisional

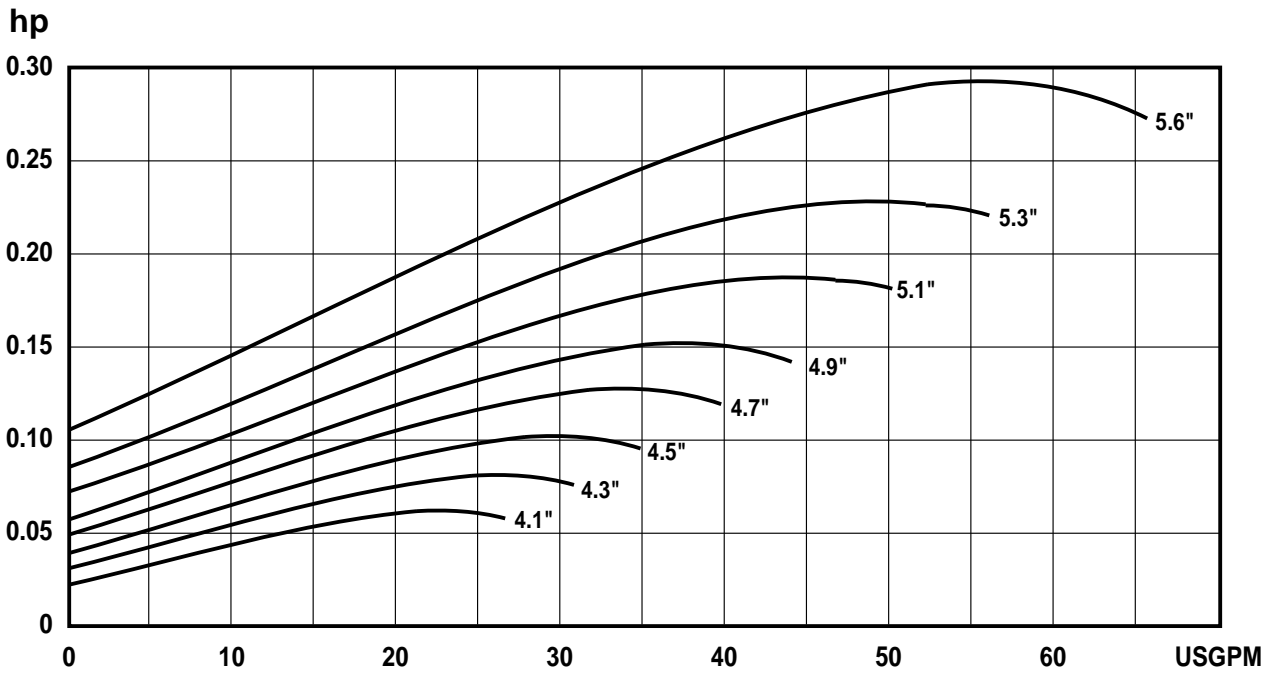
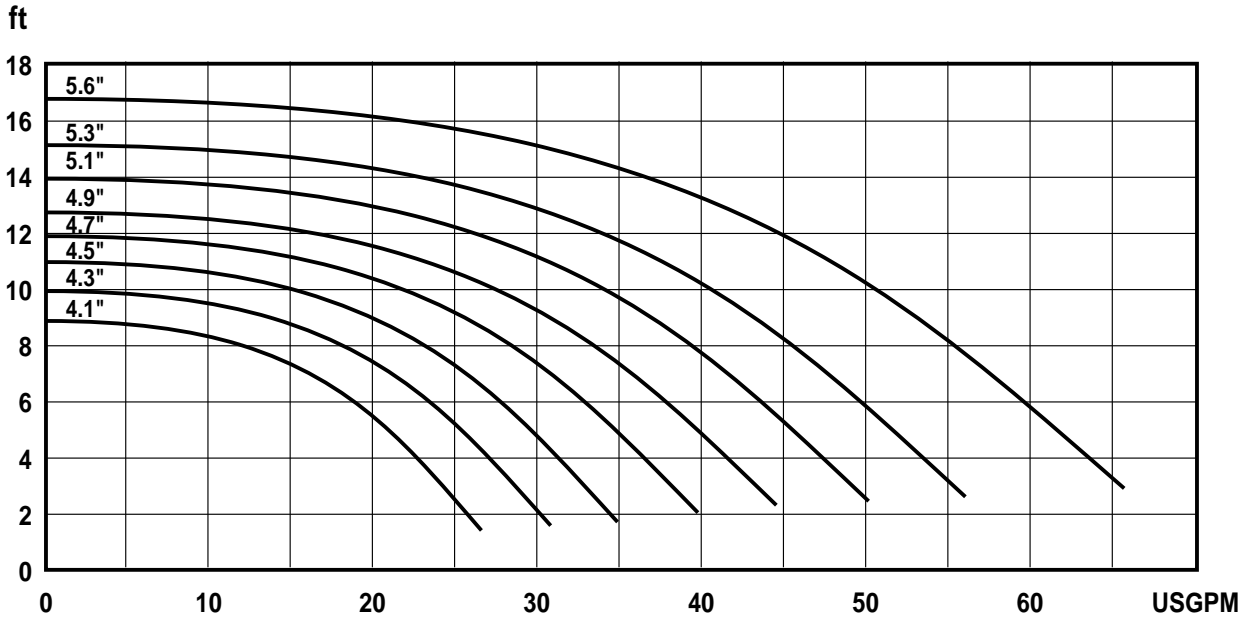




W+ SERIES MODEL W+22/20 CENTRIFUGAL PUMP CAPACITY CURVE 2" INLET - 2" OUTLET, 2900 RPM, 50 Hz

NOTE: _____

Impeller dia: Max: 5.6" - Low Flow Impeller
Performance data refer to water at 68°F
Provisional


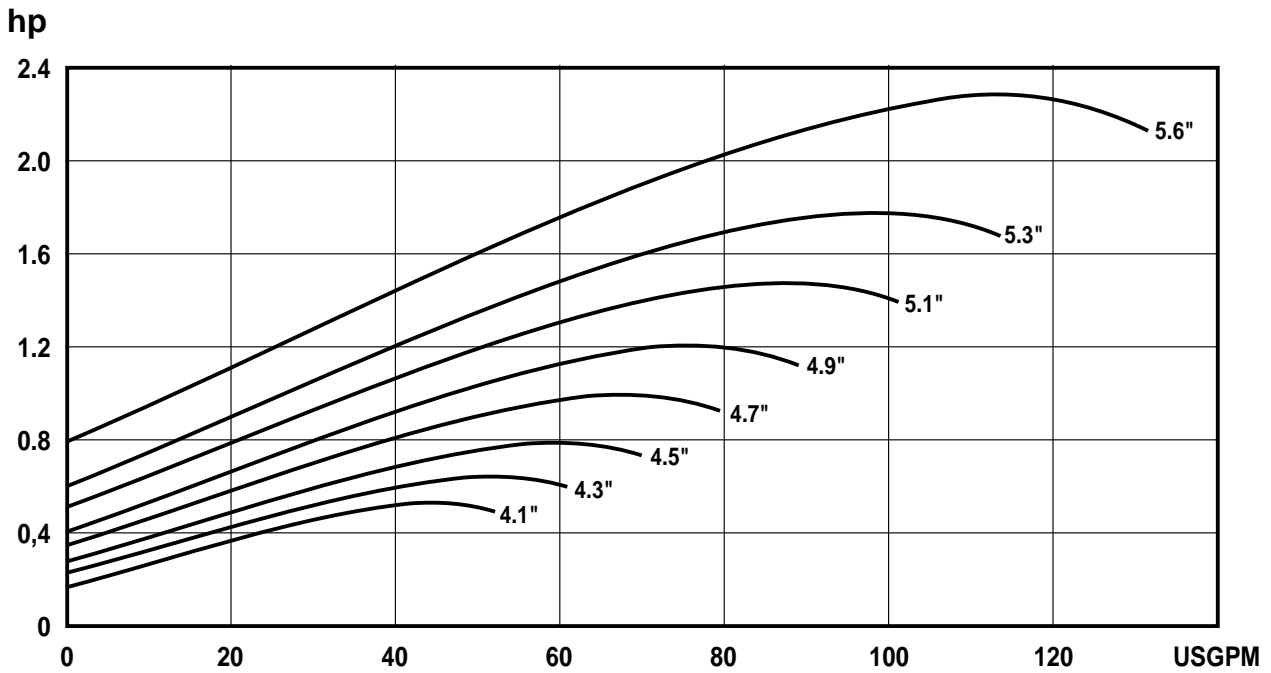
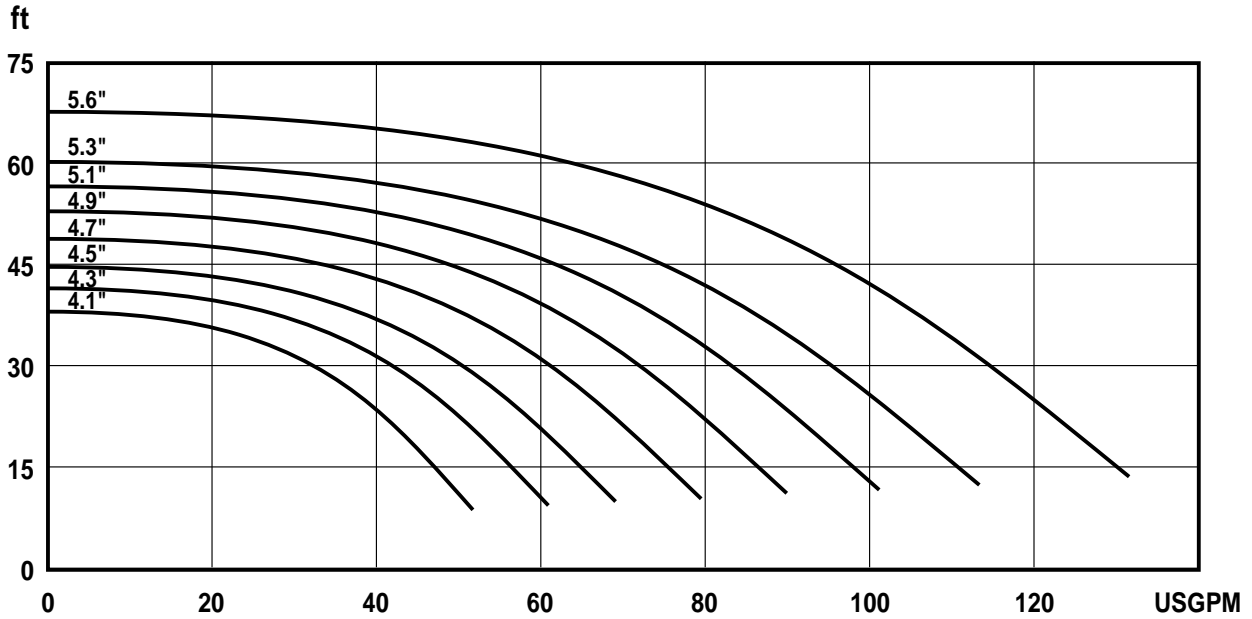




W+ SERIES MODEL W+22/20 CENTRIFUGAL PUMP CAPACITY CURVE
2" INLET - 2" OUTLET, 1450 RPM, 50 Hz

NOTE: _____

Impeller dia: Max: 5.6"
Performance data refer to water at 68°F
Permissible tolerance ± 5%

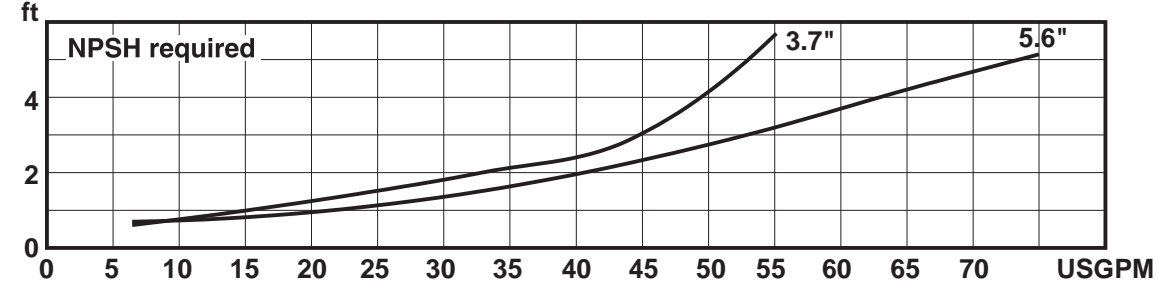
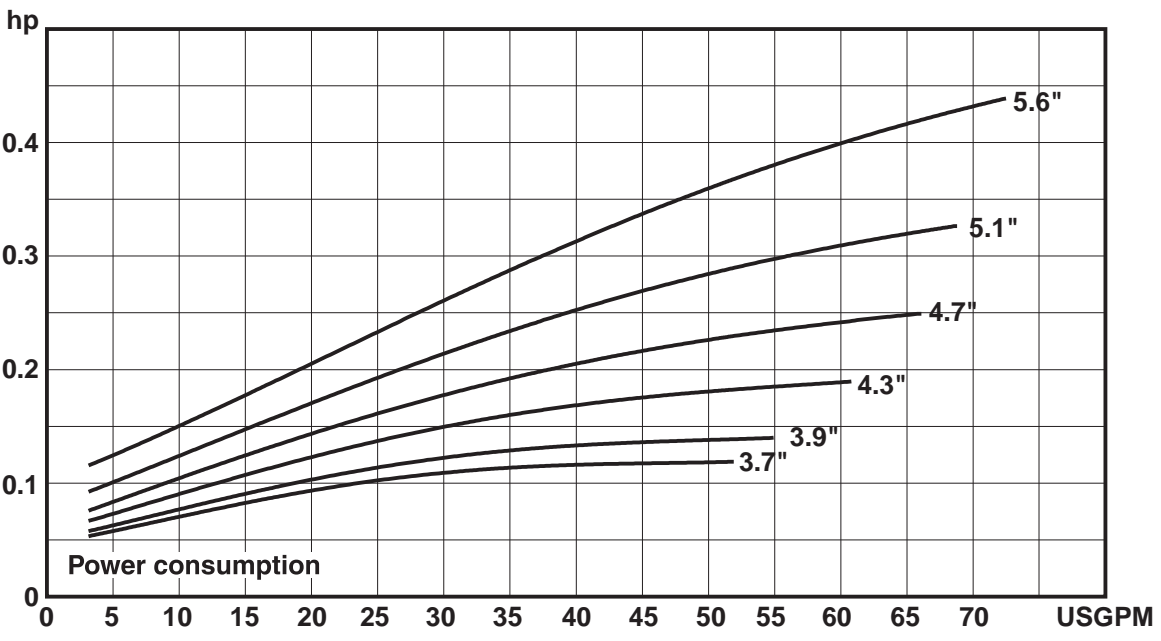
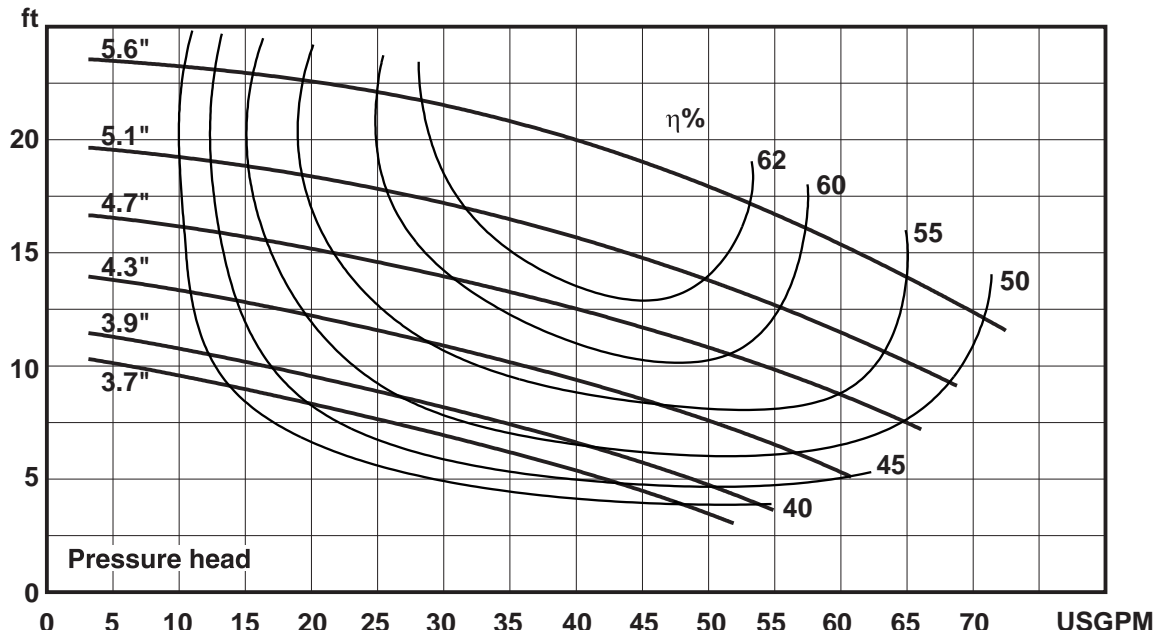




W+ SERIES MODEL W+22/20 CENTRIFUGAL PUMP CAPACITY CURVE
2" INLET - 2" OUTLET, 2900 RPM, 50 Hz

NOTE: _____

Impeller dia: Max: 5.6"
Performance data refer to water at 68°F
Permissible tolerance ± 5%

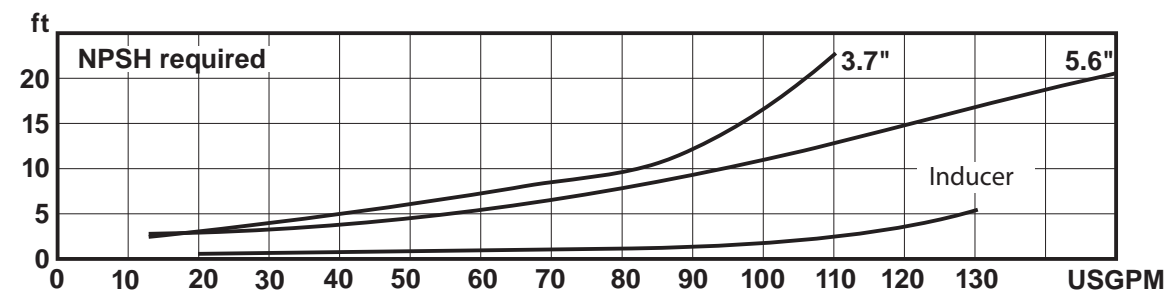
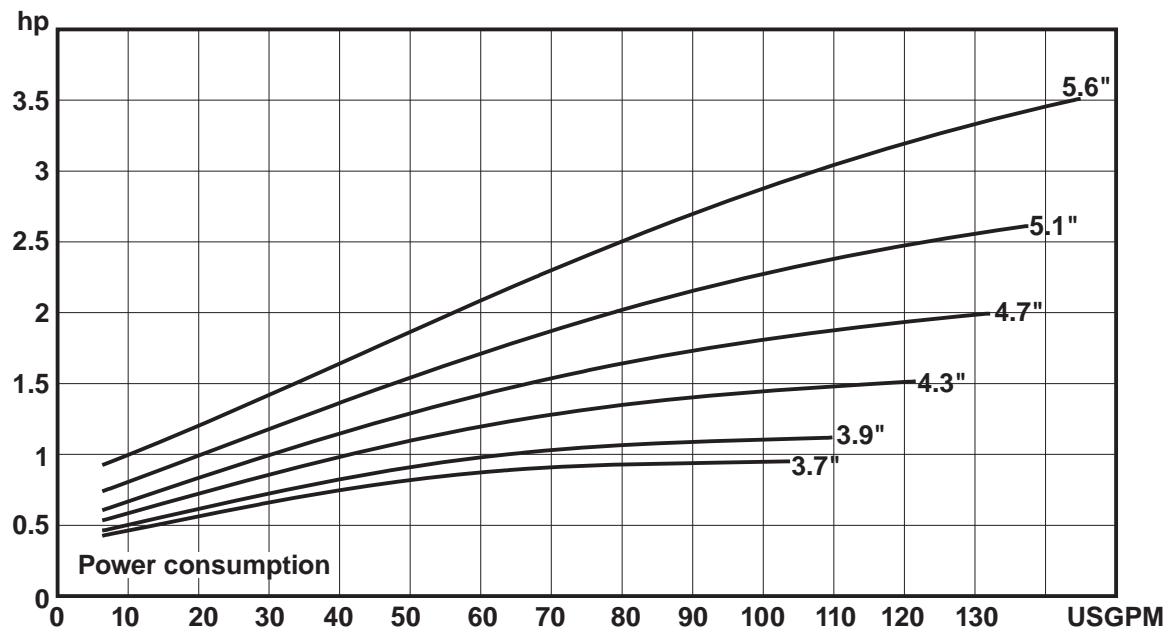
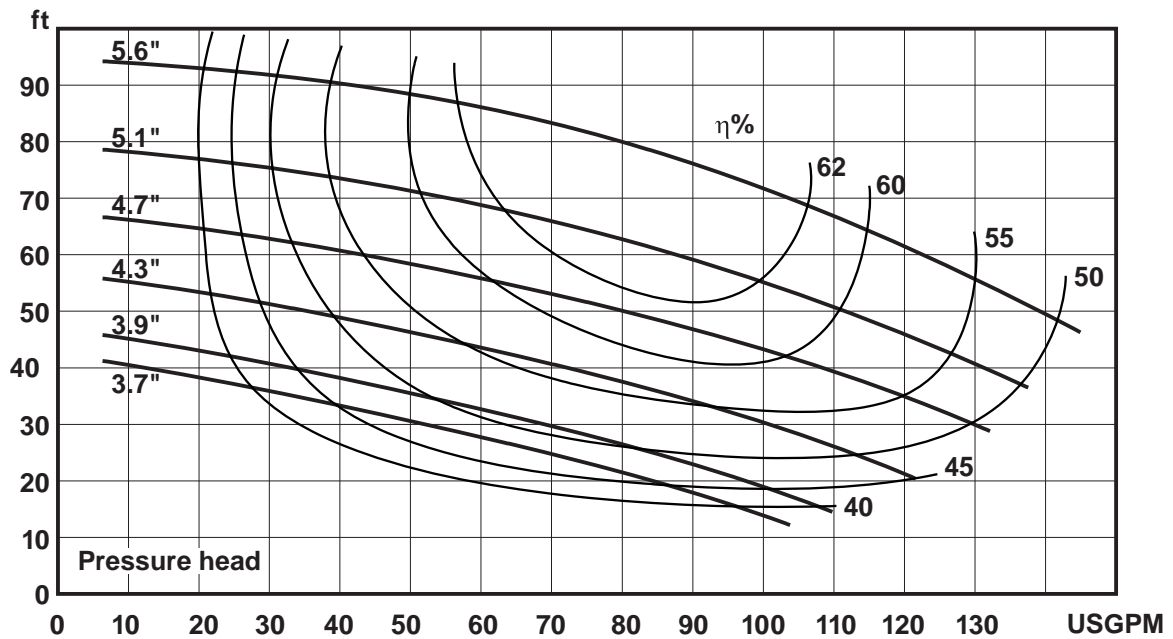




W+ SERIES MODEL W+25/210 CENTRIFUGAL PUMP CAPACITY CURVE
6" INLET - 4" OUTLET, 1450 RPM, 50 Hz

NOTE: _____

Impeller dia: Max: 11.4"
Performance data refer to water at 68°F
Permissible tolerance ± 5%

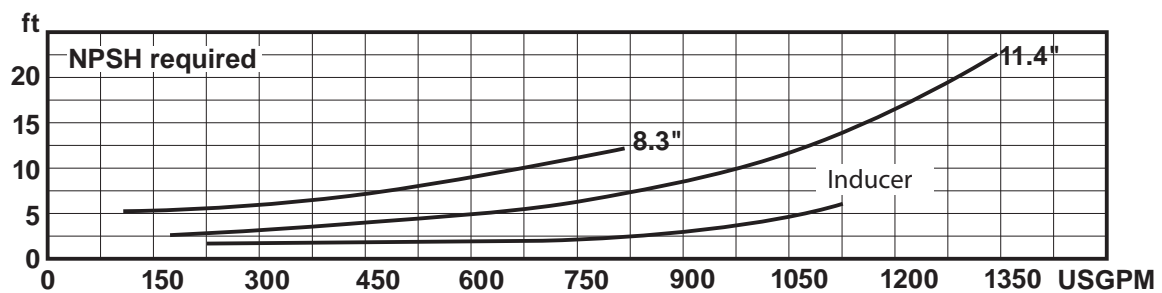
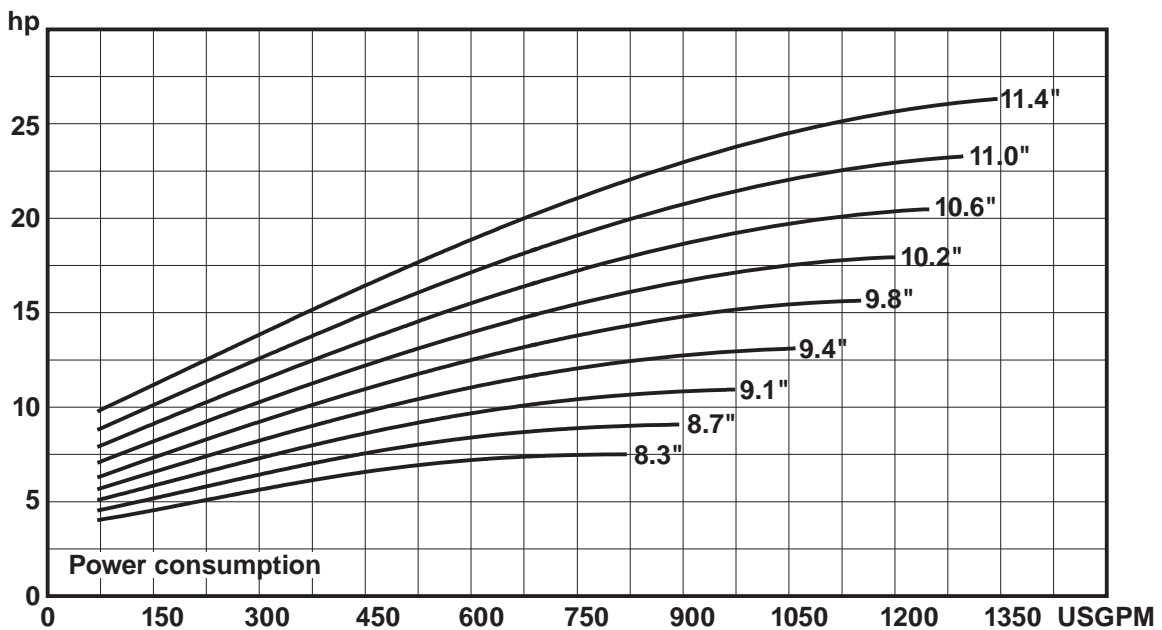
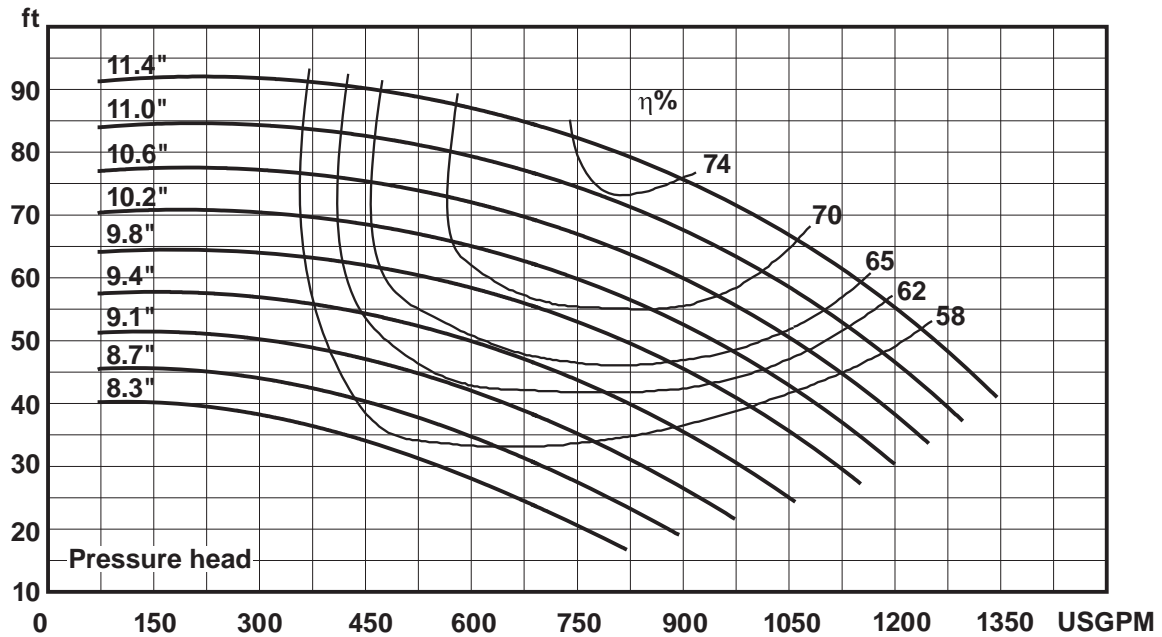




W+ SERIES MODEL W+30/80 CENTRIFUGAL PUMP CAPACITY CURVE
4" INLET - 3" OUTLET, 1450 RPM, 50 Hz

NOTE: _____

Impeller dia: Max: 6.7"
 Performance data refer to water at 68°F
 Permissible tolerance ± 5%

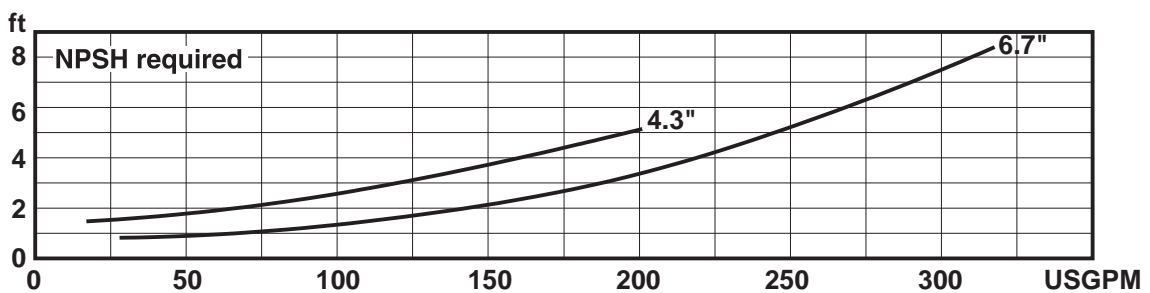
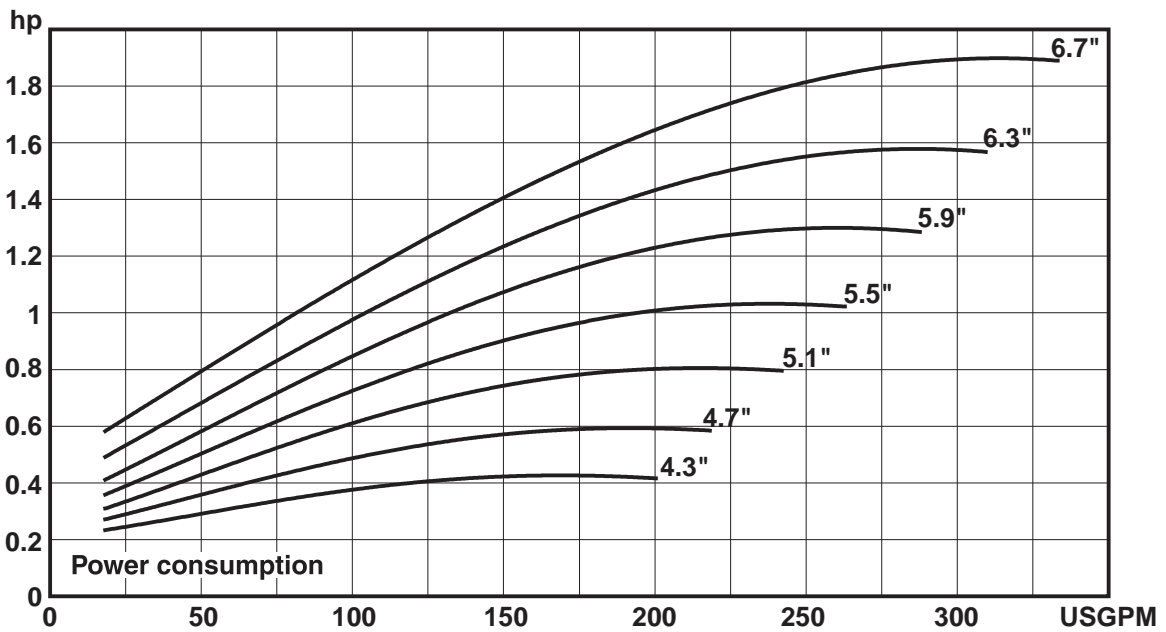
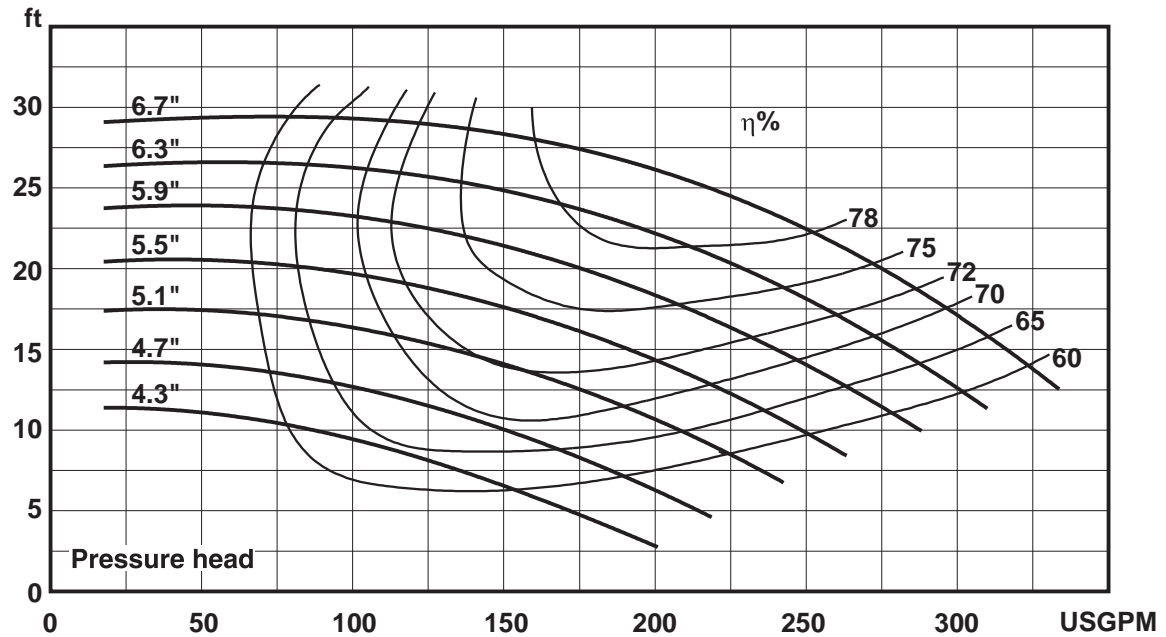




W+ SERIES MODEL W+30/80 CENTRIFUGAL PUMP CAPACITY CURVE
4" INLET - 3" OUTLET, 2900 RPM, 50 Hz

NOTE: _____

Impeller dia: Max: 6.7"
Performance data refer to water at 68°F
Permissible tolerance ± 5%

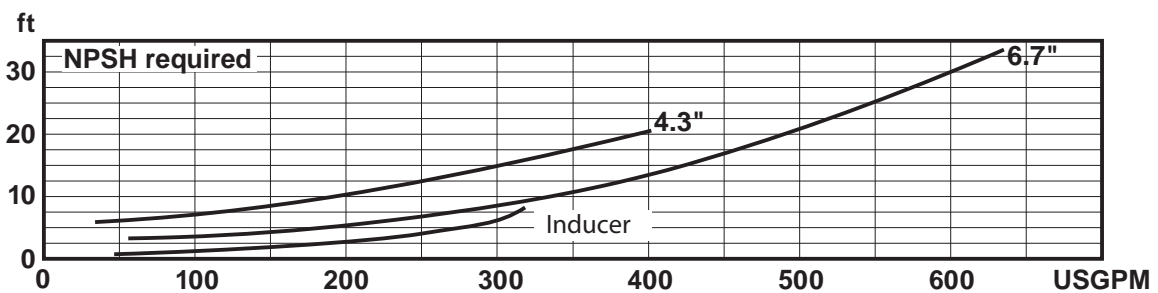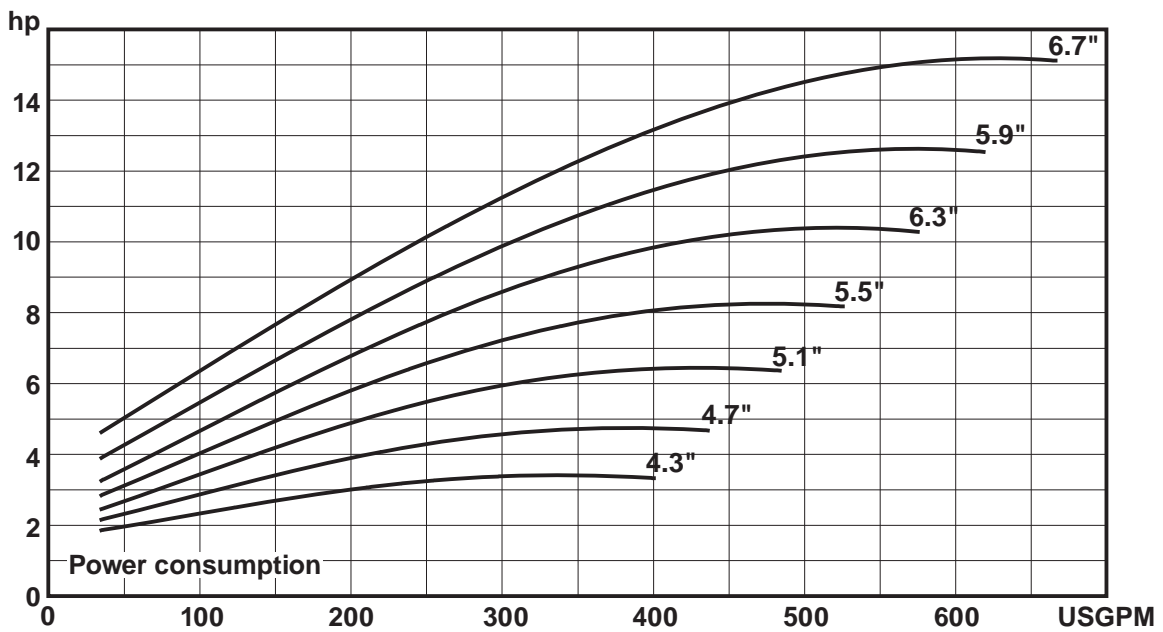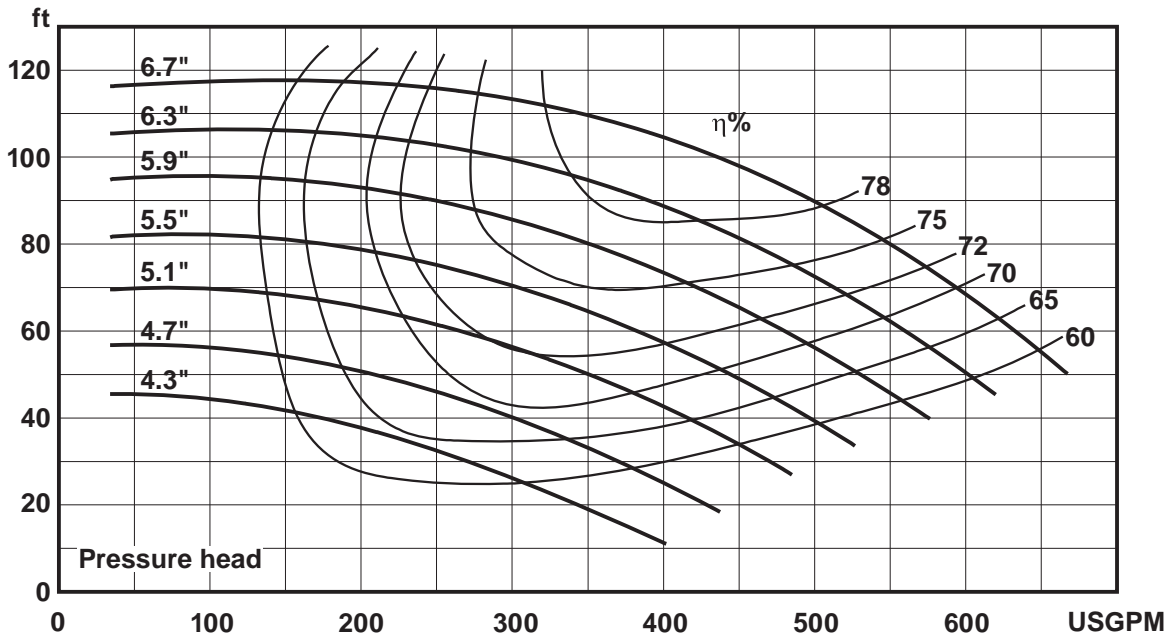




W+ SERIES MODEL W+30/120 CENTRIFUGAL PUMP CAPACITY CURVE
4" INLET - 3" OUTLET, 1450 RPM, 50 Hz

NOTE: _____

Impeller dia: Max: 6.9"
Performance data refer to water at 68°F
Permissible tolerance ± 5%



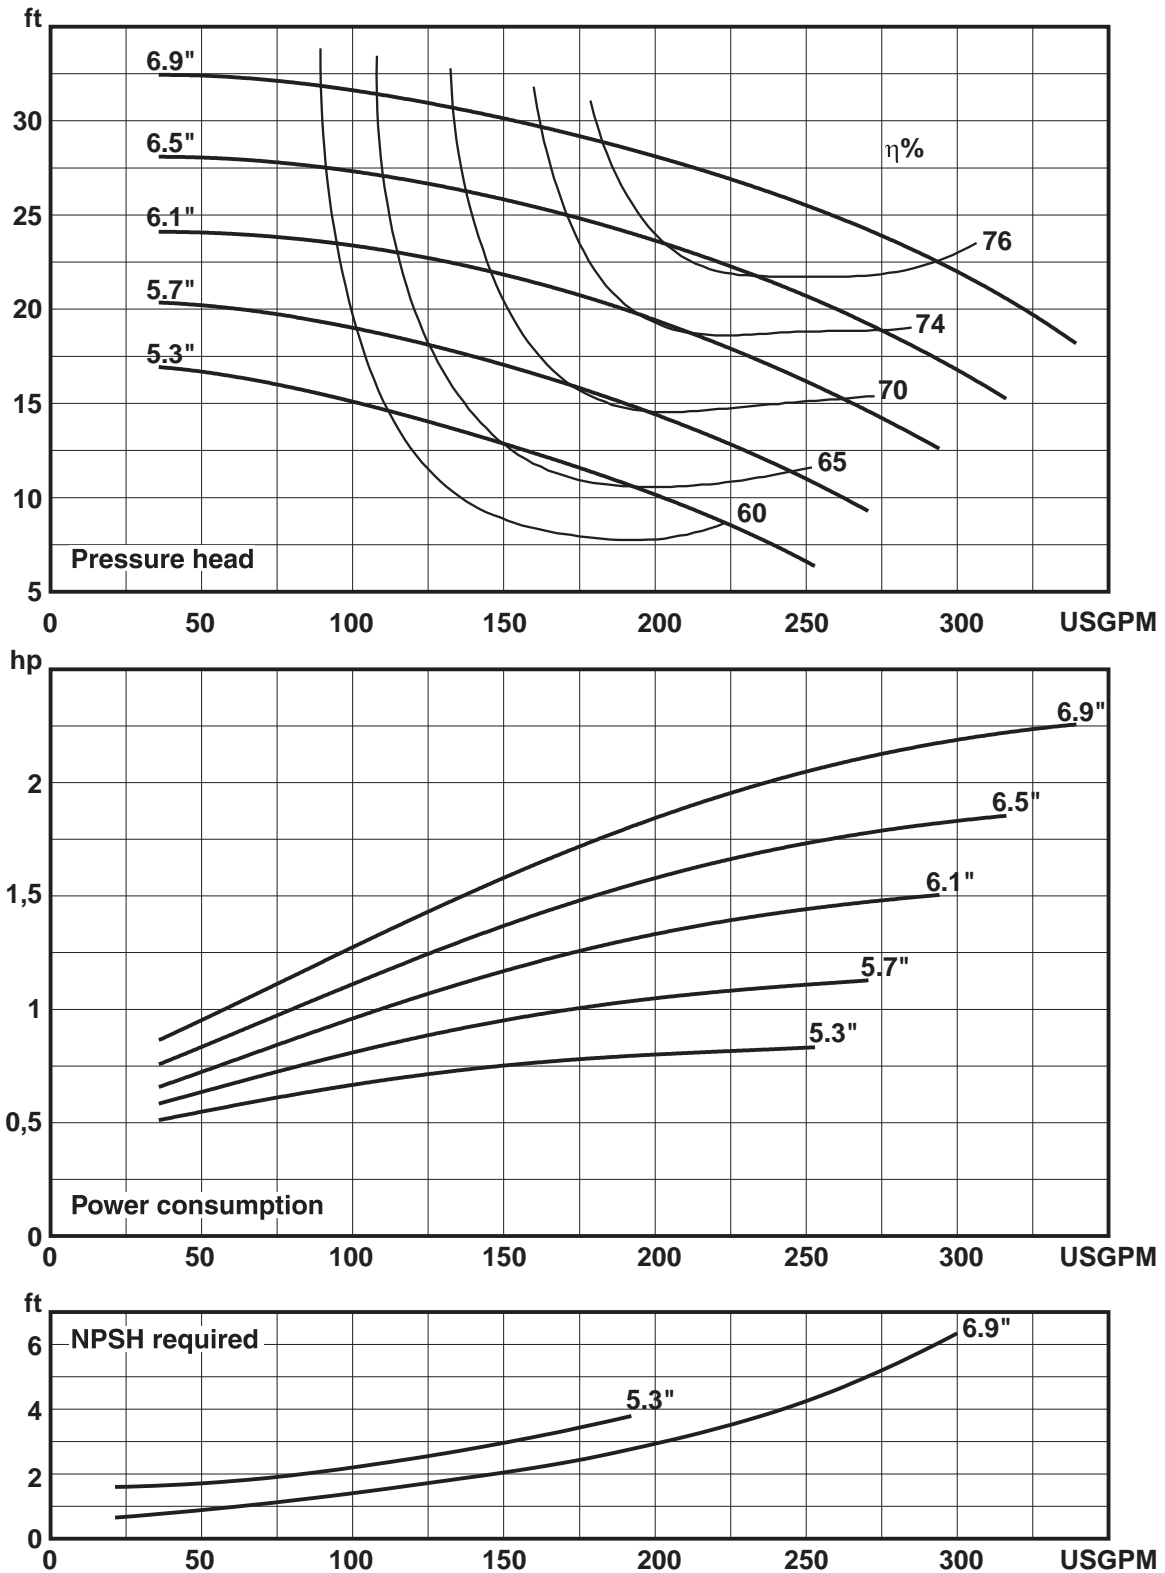




W+ SERIES MODEL W+30/120 CENTRIFUGAL PUMP CAPACITY CURVE
4" INLET - 3" OUTLET, 2900 RPM, 50 Hz

NOTE: _____

Impeller dia: Max: 6.9"
Performance data refer to water at 68°F
Permissible tolerance ± 5%

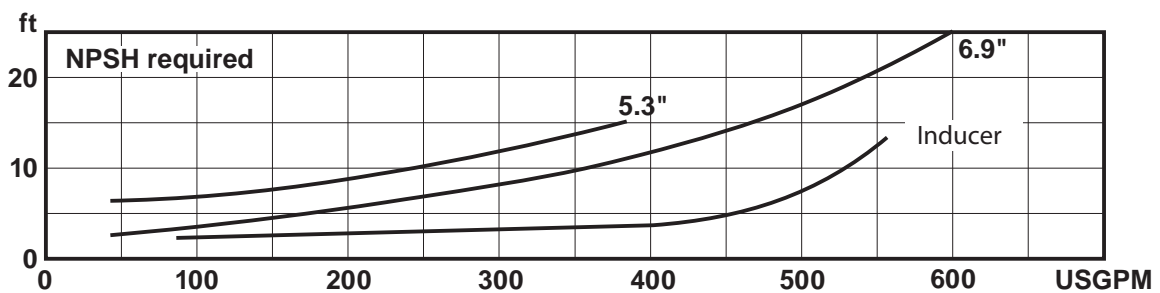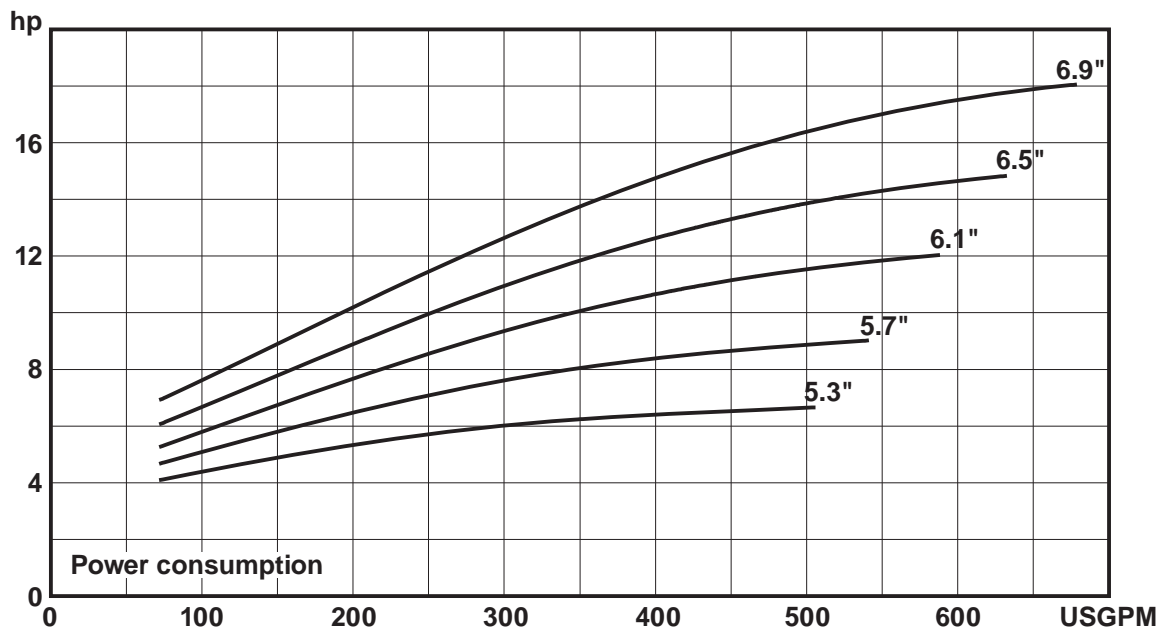
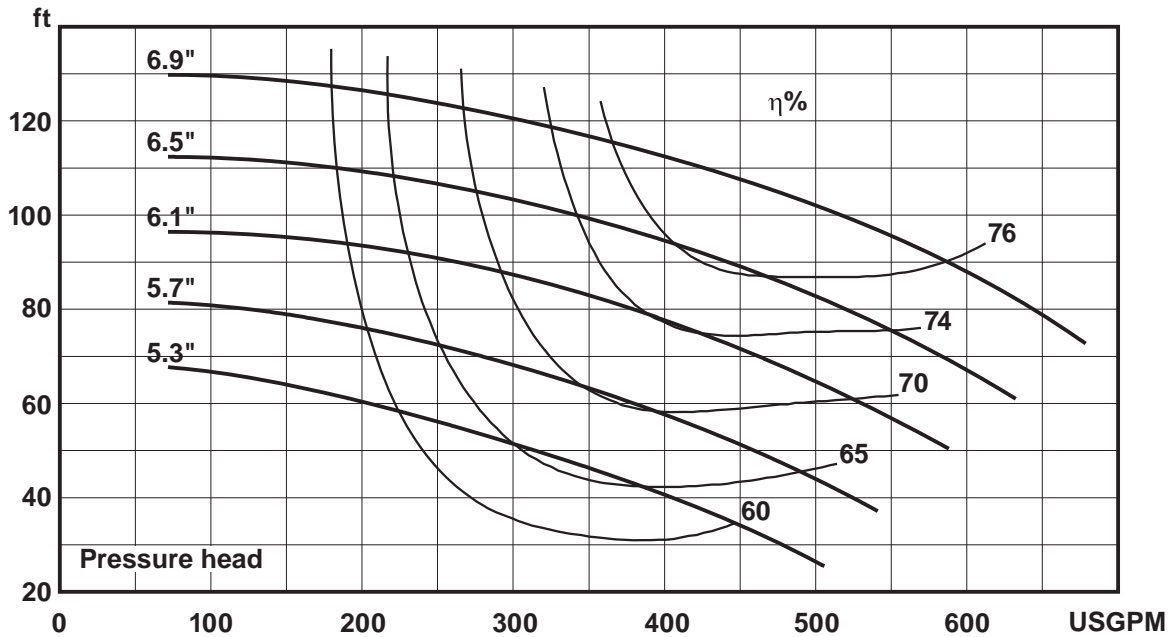




W+ SERIES MODEL W+35/35 CENTRIFUGAL PUMP CAPACITY CURVE 2.5" INLET - 2" OUTLET, 1450 RPM, 50 Hz

NOTE: _____

Impeller dia: Max: 6.9" - Low Flow Impeller
Performance data refer to water at 68°F
Provisional

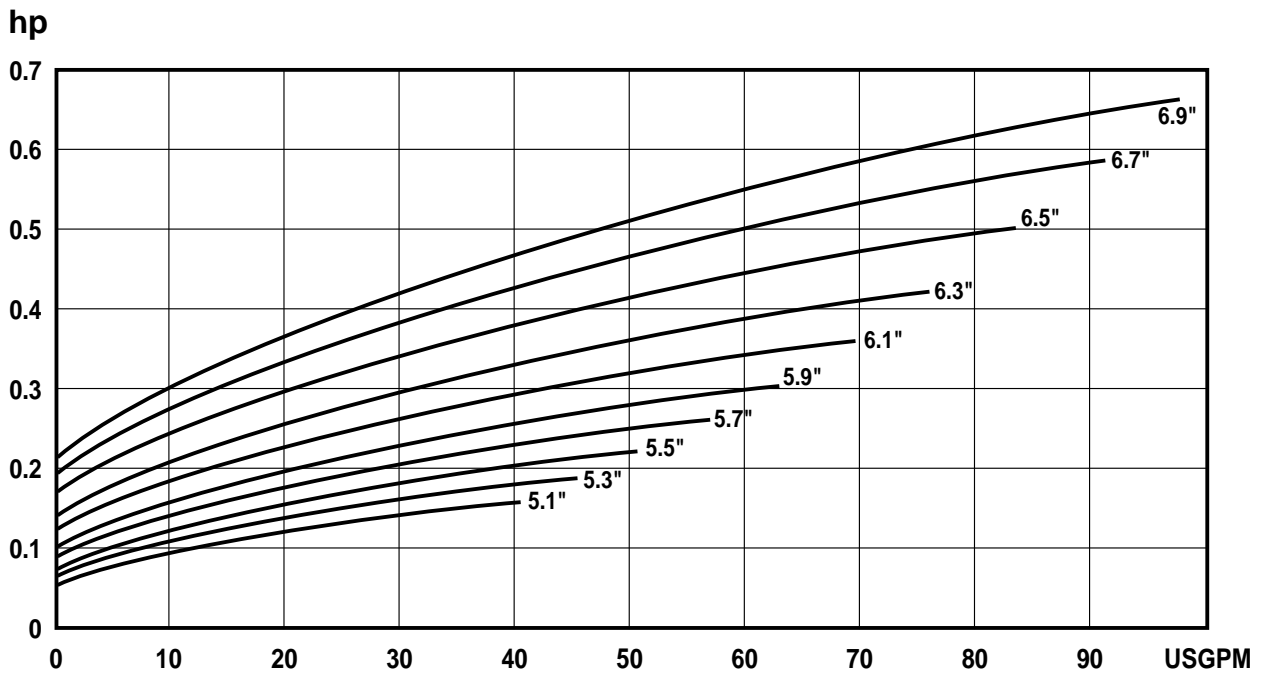
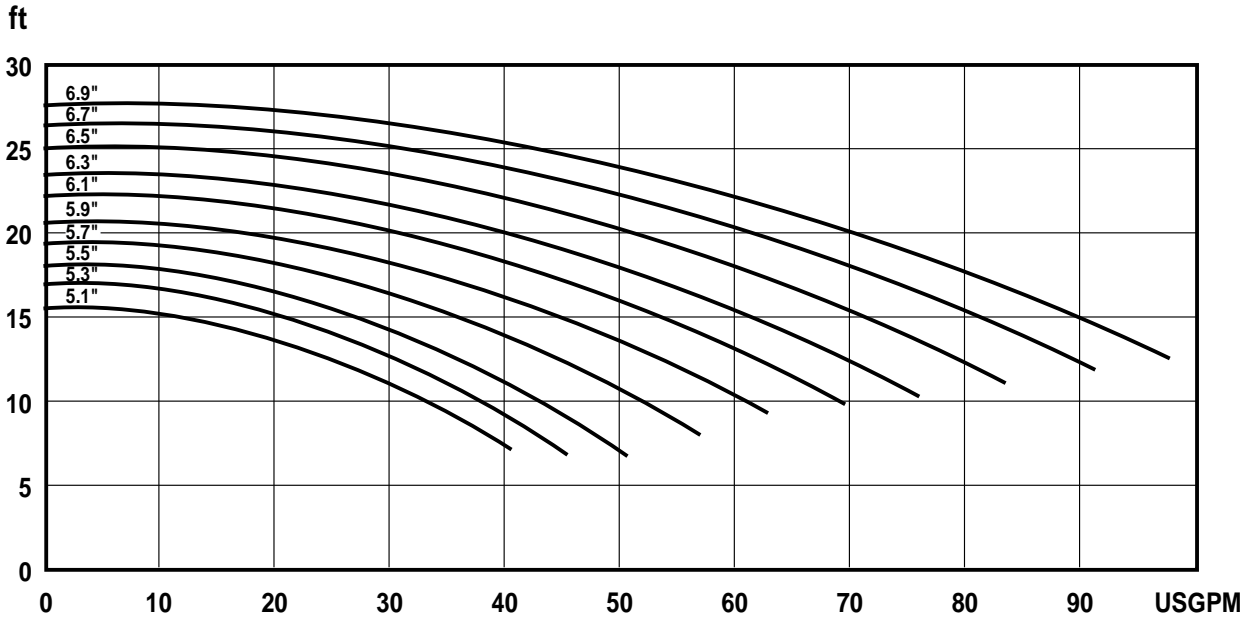




**W+ SERIES MODEL W+35/35 CENTRIFUGAL PUMP CAPACITY CURVE
2.5" INLET - 2" OUTLET, 2900 RPM, 50 Hz**

NOTE: _____

Impeller dia: Max: 6.9" - Low Flow Impeller
Performance data refer to water at 68°F
Provisional


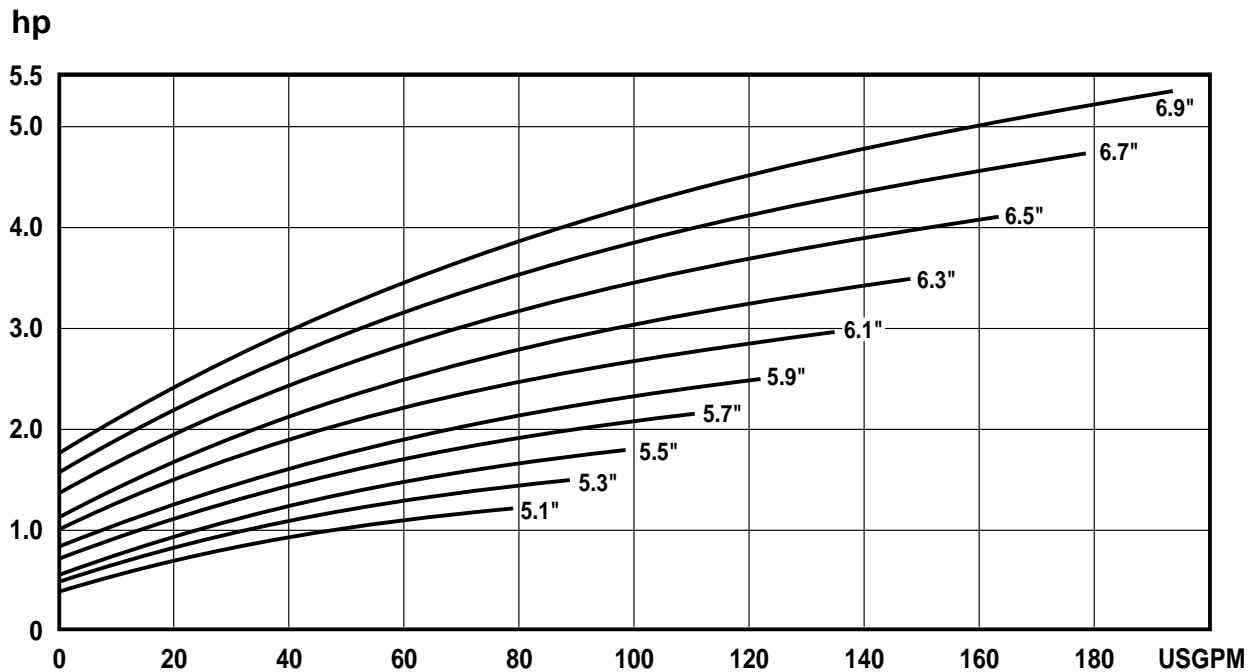
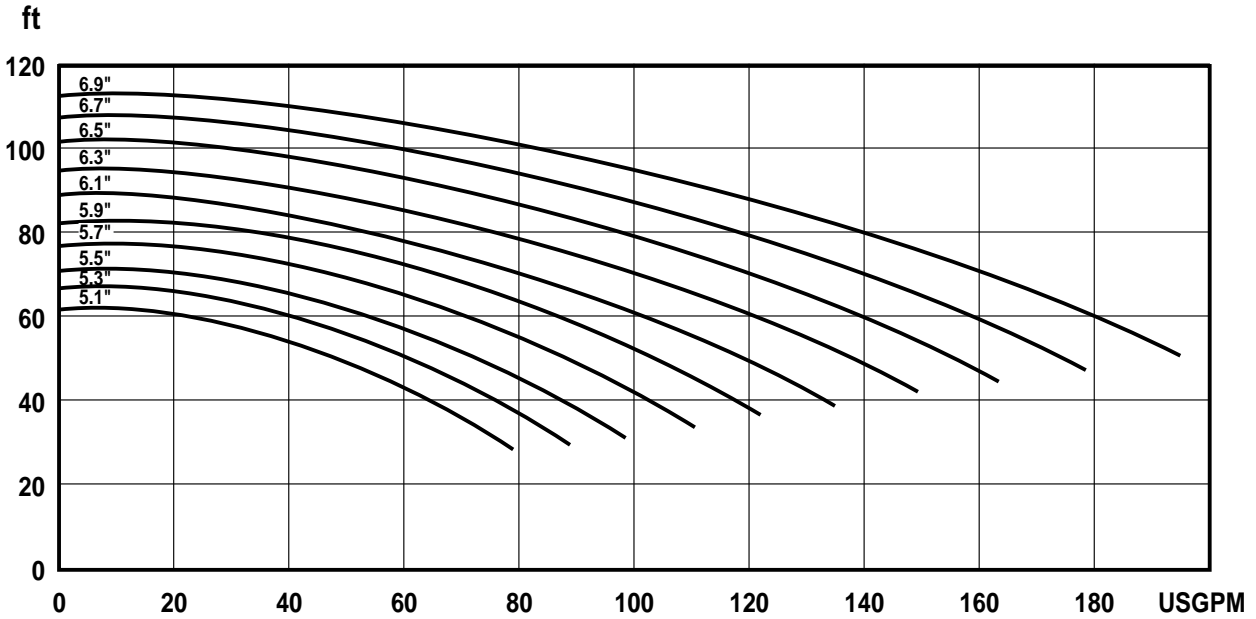




W+ SERIES MODEL W+35/35 CENTRIFUGAL PUMP CAPACITY CURVE
2.5" INLET - 2" OUTLET, 1450 RPM, 50 Hz

NOTE: _____

Impeller dia: Max: 6.9"
Performance data refer to water at 68°F
Permissible tolerance ± 5%

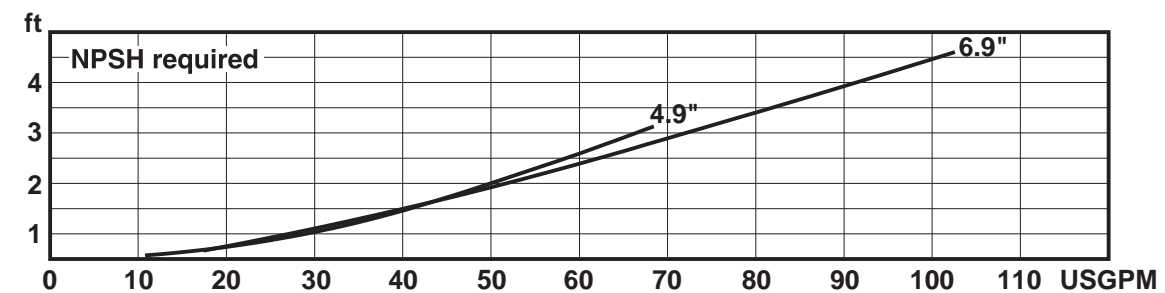
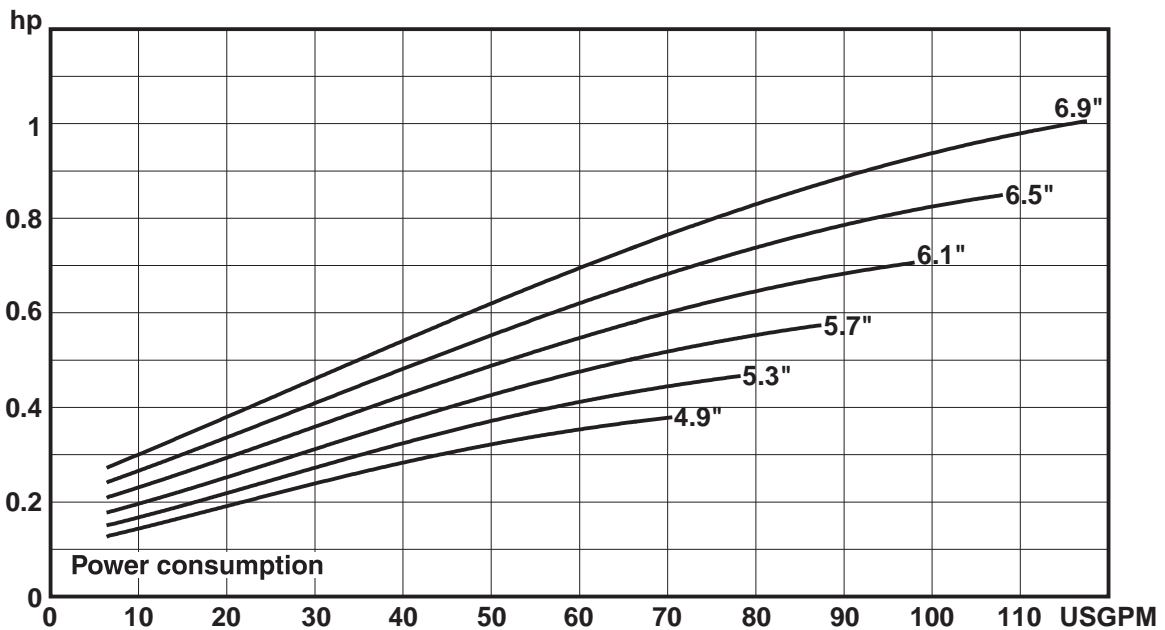
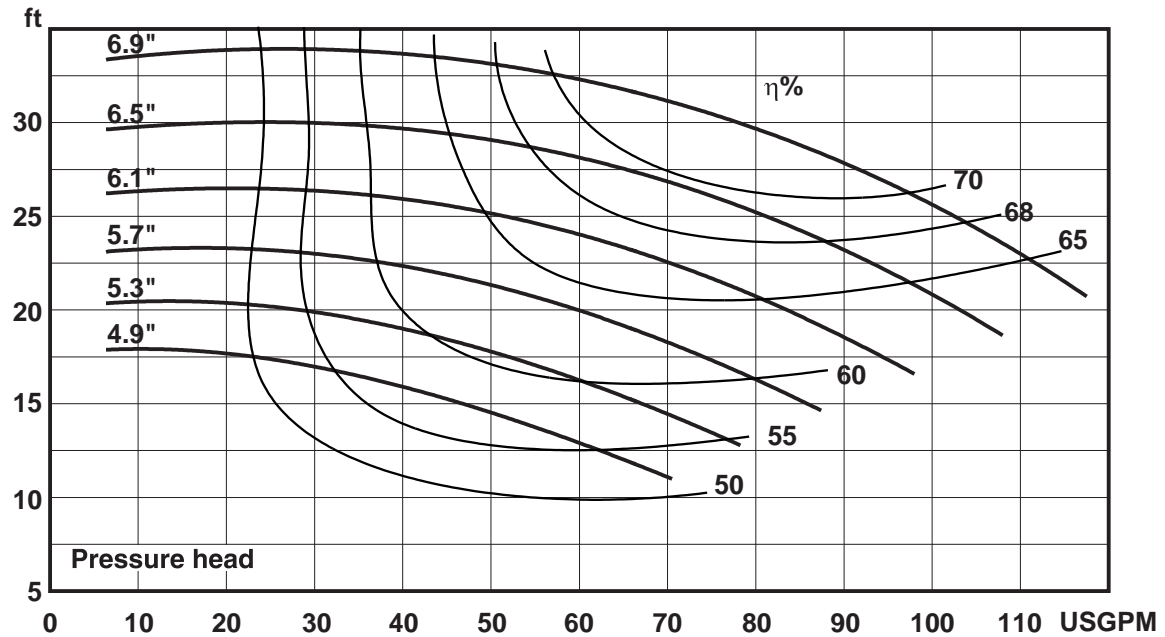




W+ SERIES MODEL W+35/35 CENTRIFUGAL PUMP CAPACITY CURVE
2.5" INLET - 2" OUTLET, 2900 RPM, 50 Hz

NOTE: _____

Impeller dia: Max: 6.9"
Performance data refer to water at 68°F
Permissible tolerance ± 5%

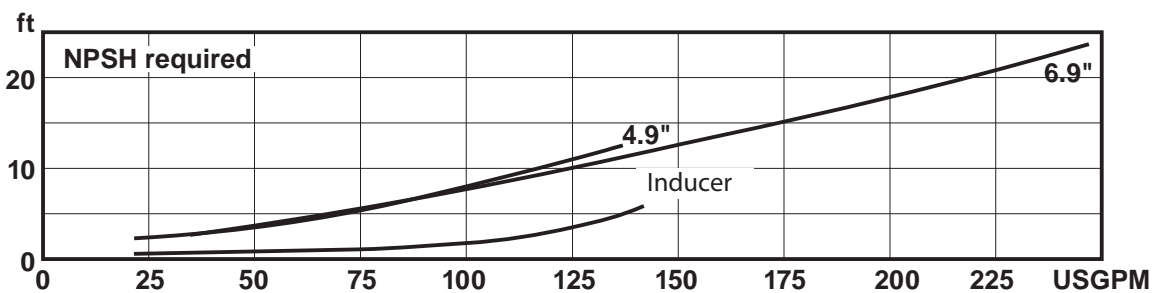
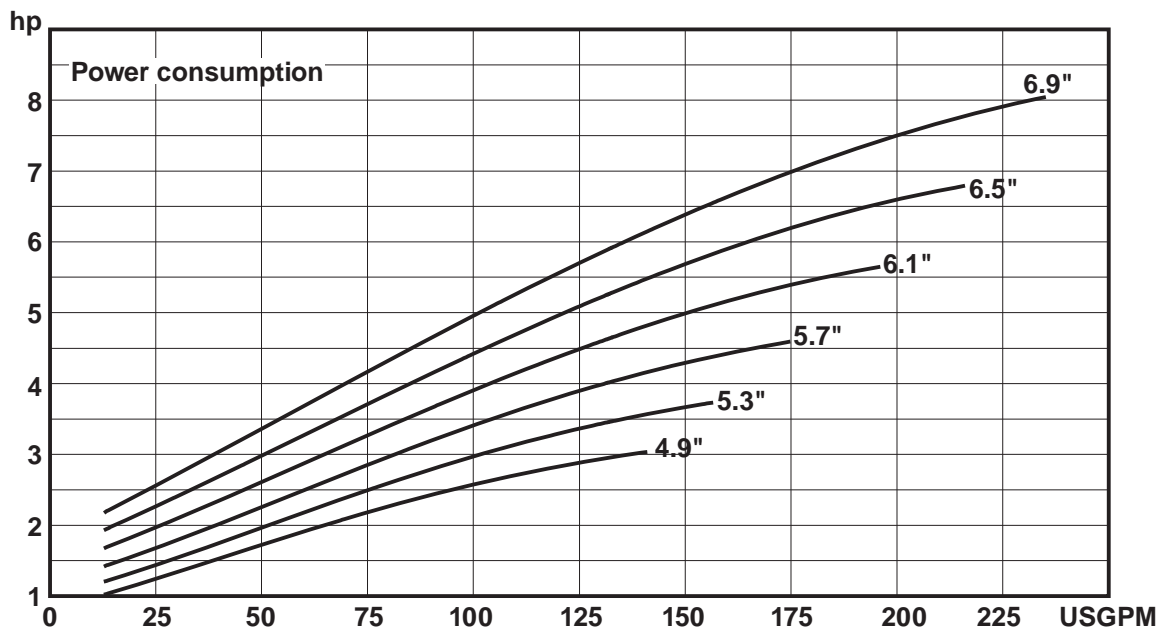
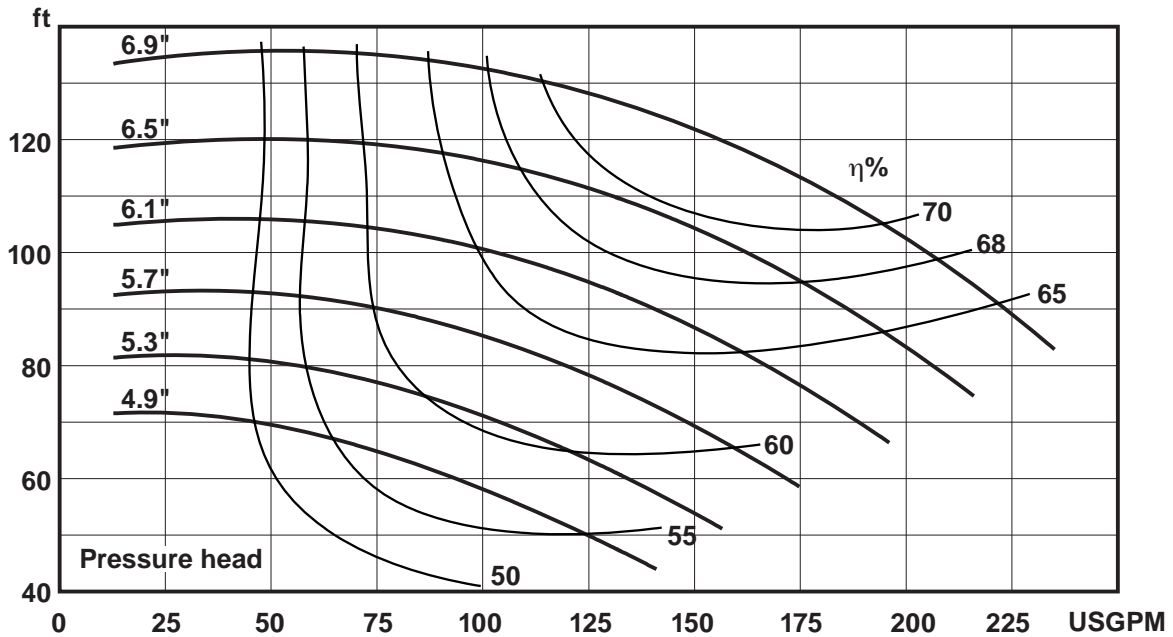




W+ SERIES MODEL W+35/55 CENTRIFUGAL PUMP CAPACITY CURVE
3" INLET - 2.5" OUTLET, 1450 RPM, 50 Hz

NOTE: _____

Impeller dia: Max: 7.1"
Performance data refer to water at 68°F
Permissible tolerance ± 5%

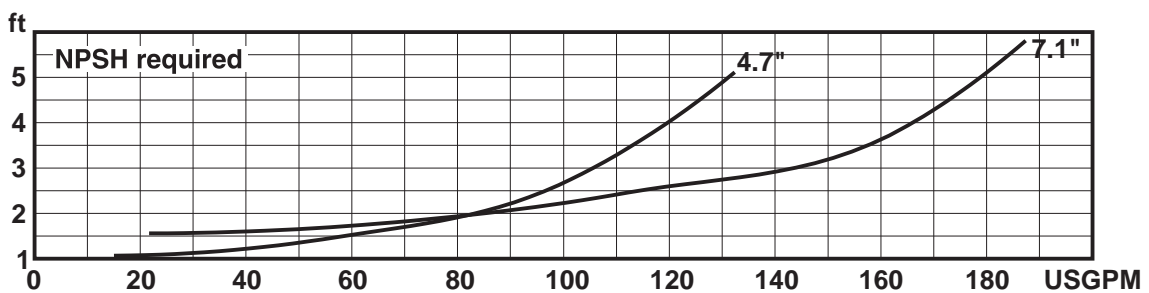
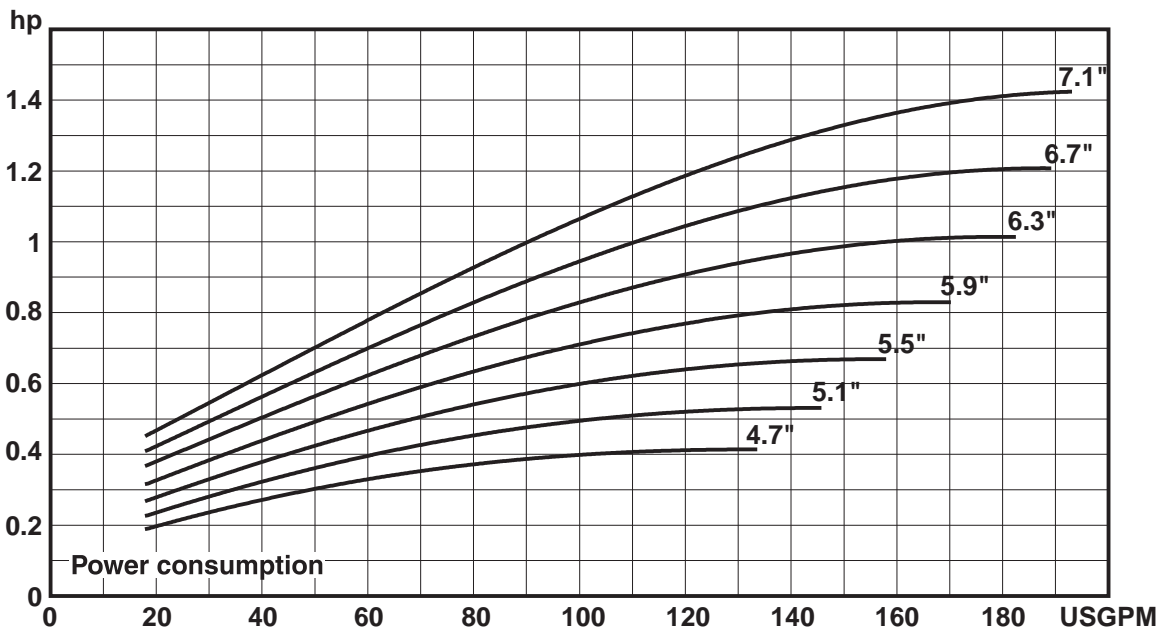
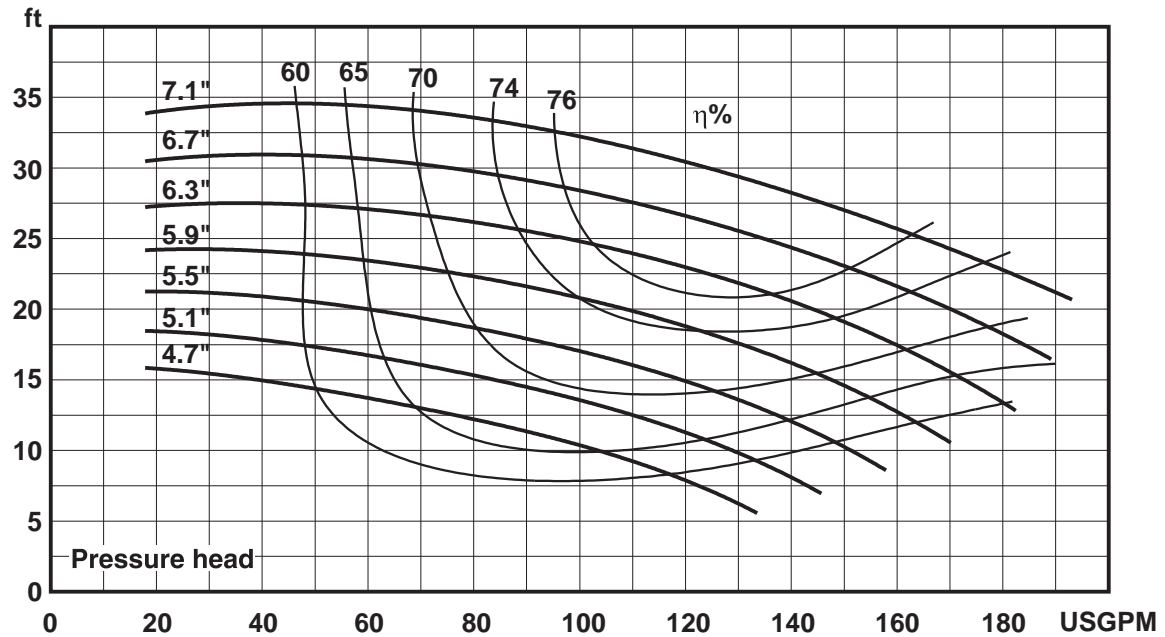




W+ SERIES MODEL W+35/55 CENTRIFUGAL PUMP CAPACITY CURVE
3" INLET - 2.5" OUTLET, 2900 RPM, 50 Hz

NOTE: _____

Impeller dia: Max: 7.1"
Performance data refer to water at 68°F
Permissible tolerance ± 5%

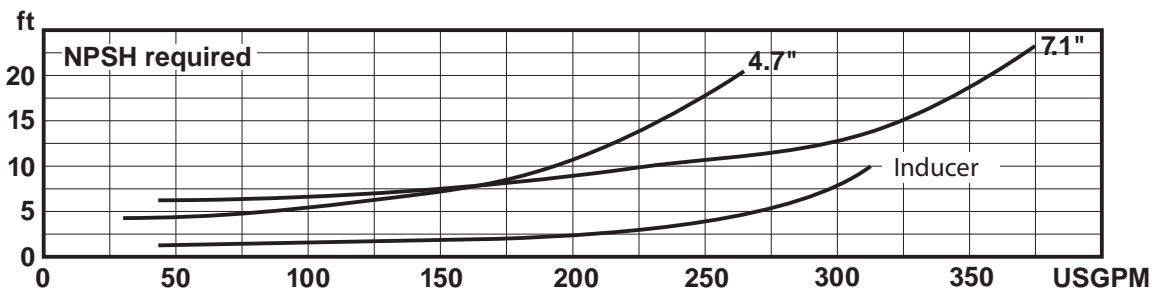
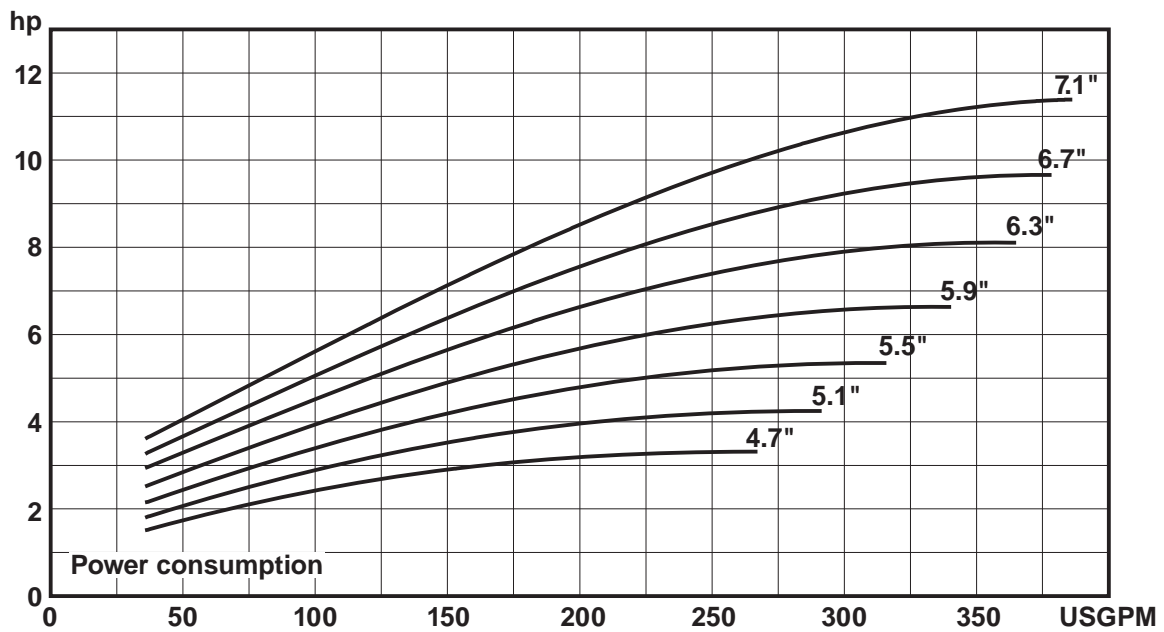
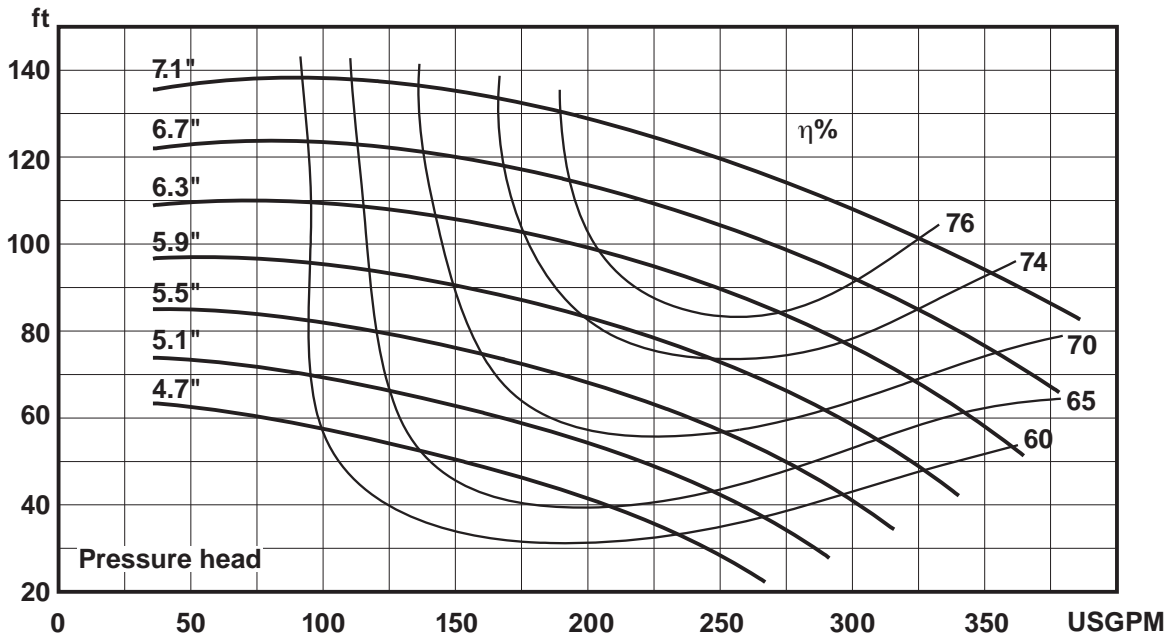




W+ SERIES MODEL W+50/8 CENTRIFUGAL PUMP CAPACITY CURVE
1.5" INLET - 1" OUTLET, 1450 RPM, 50 Hz

NOTE: _____

Impeller dia: Max: 7.9"
Performance data refer to water at 68°F
Permissible tolerance ± 5%

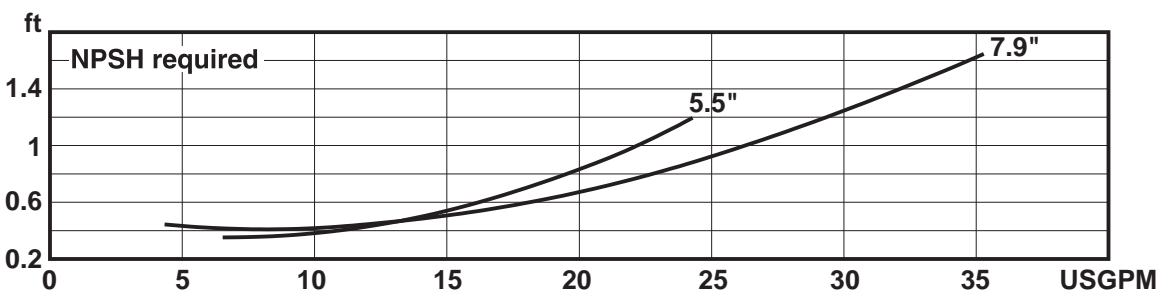
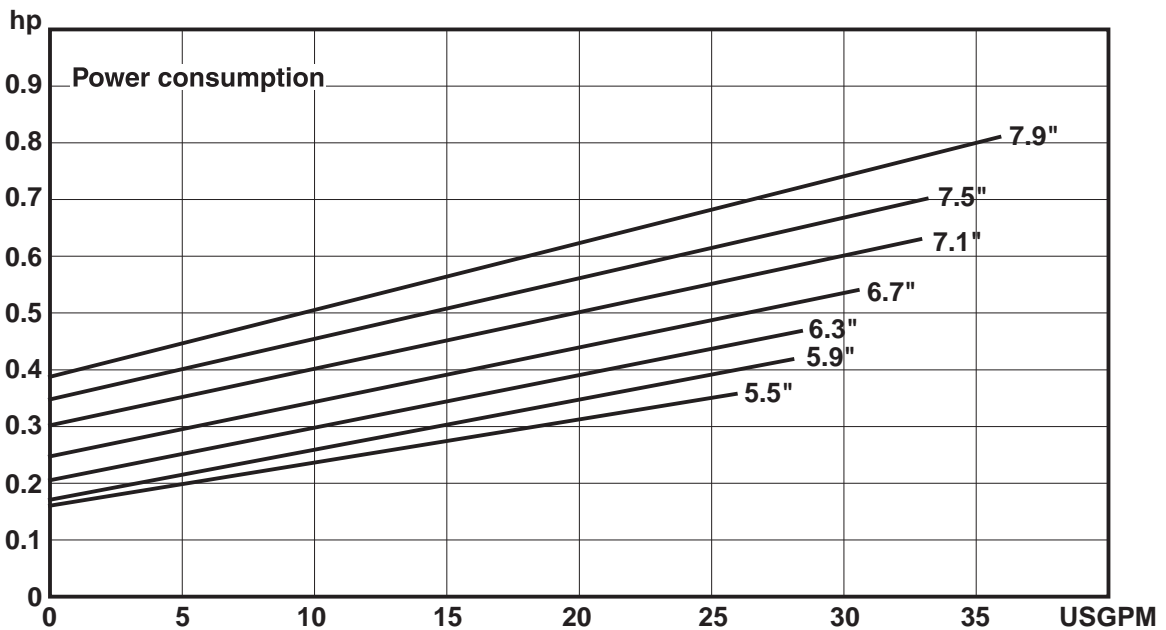
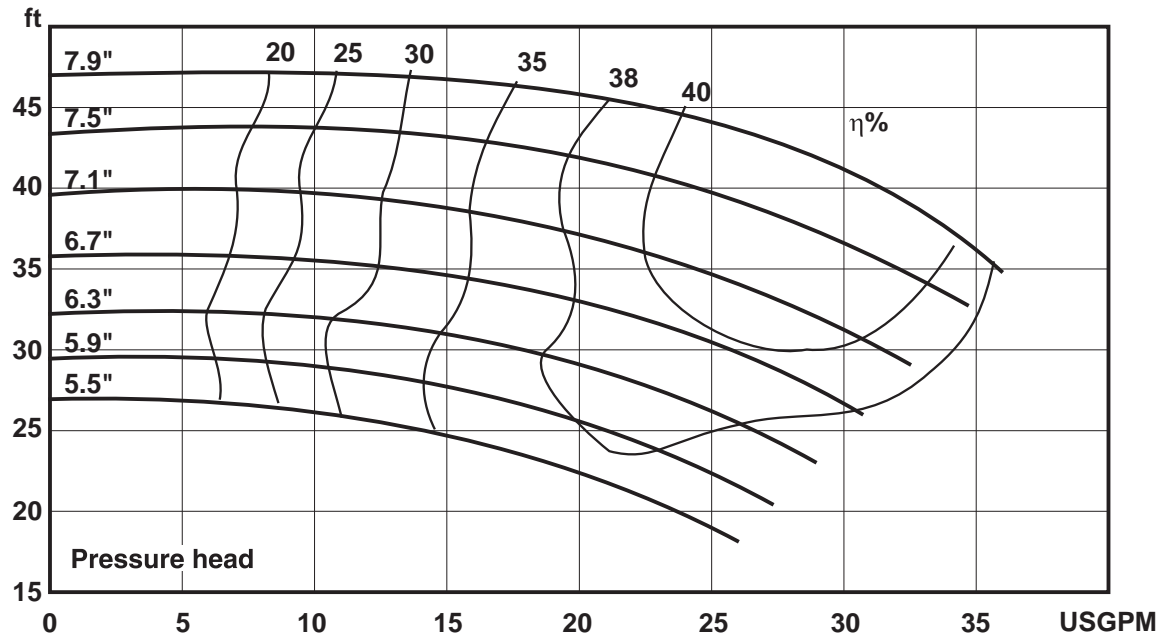




W+ SERIES MODEL W+50/8 CENTRIFUGAL PUMP CAPACITY CURVE
1.5" INLET - 1" OUTLET, 2900 RPM, 50 Hz

NOTE: _____

Impeller dia: Max: 7.9"
Performance data refer to water at 68°F
Permissible tolerance ± 5%

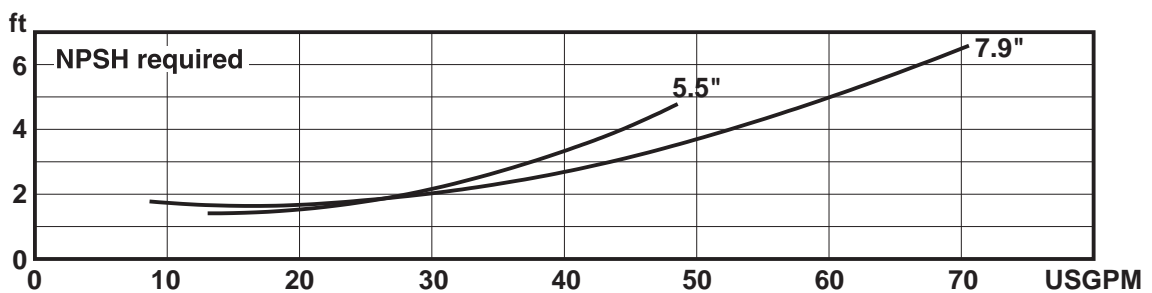
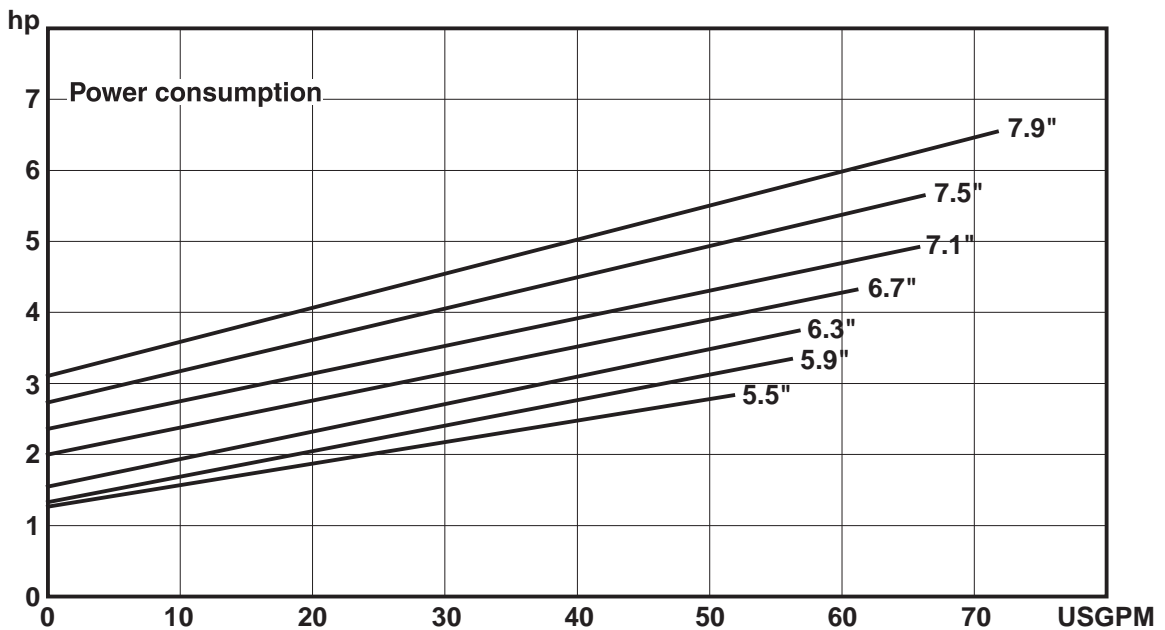
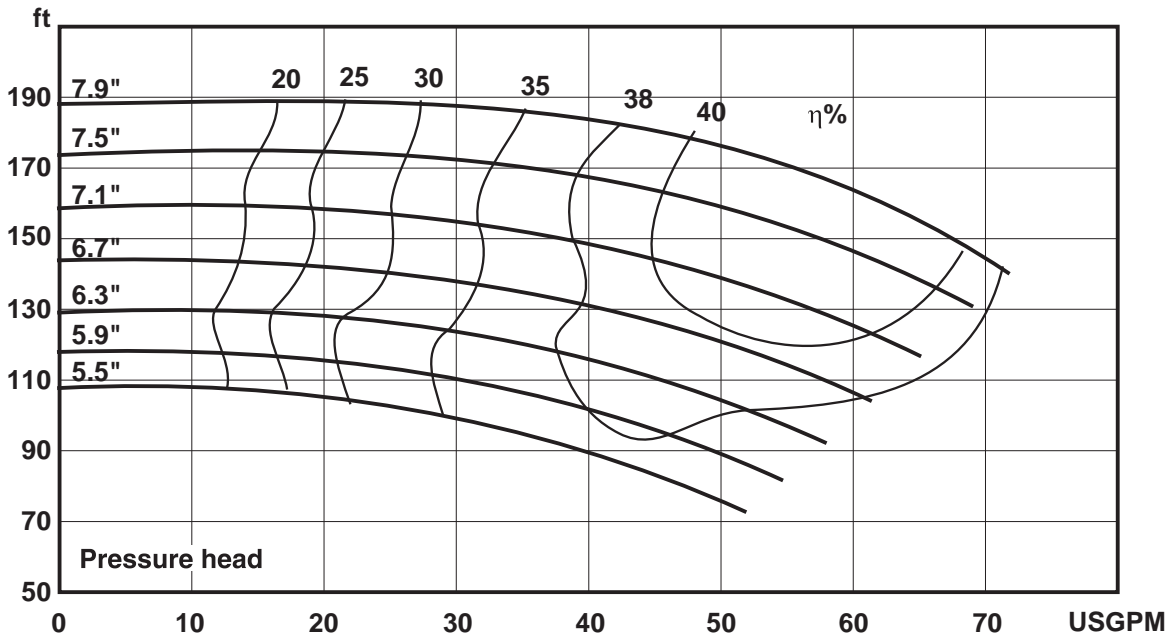




W+ SERIES MODEL W+55/35 CENTRIFUGAL PUMP CAPACITY CURVE
2.5" INLET - 1.5" OUTLET, 1450 RPM, 50 Hz

NOTE: _____

Impeller dia: Max: 8.3"
Performance data refer to water at 68°F
Permissible tolerance ± 5%

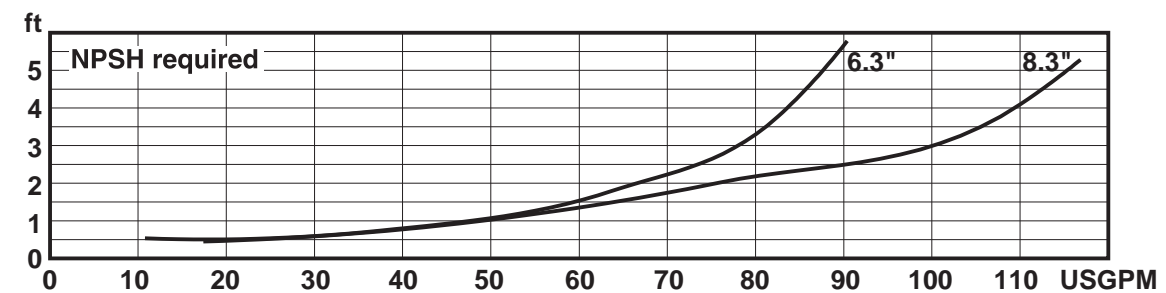
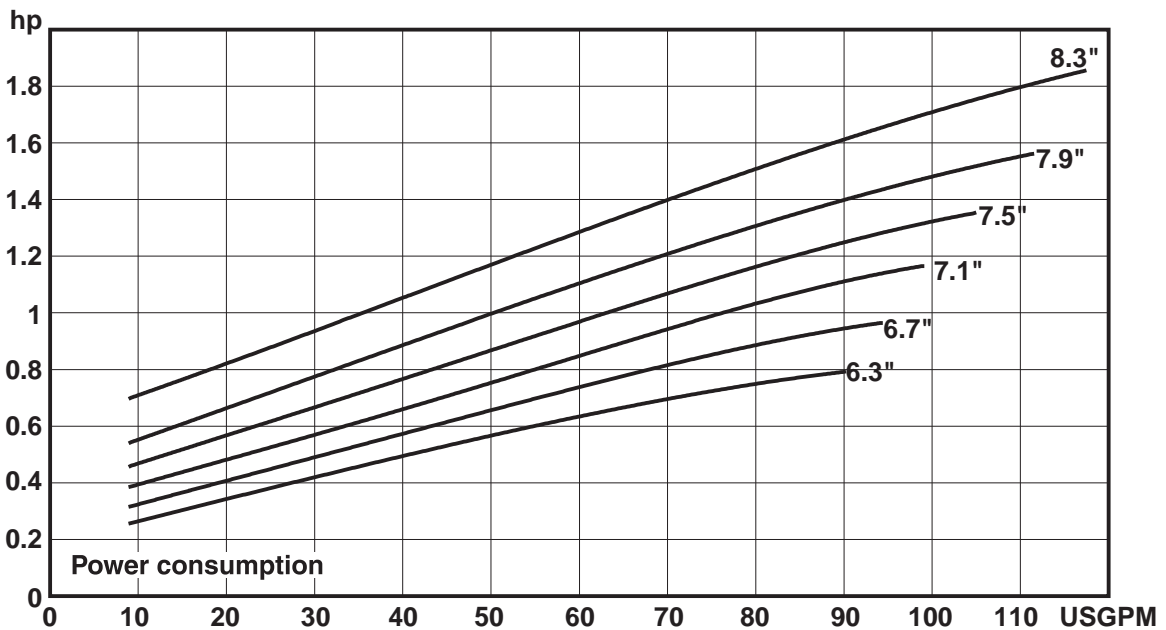
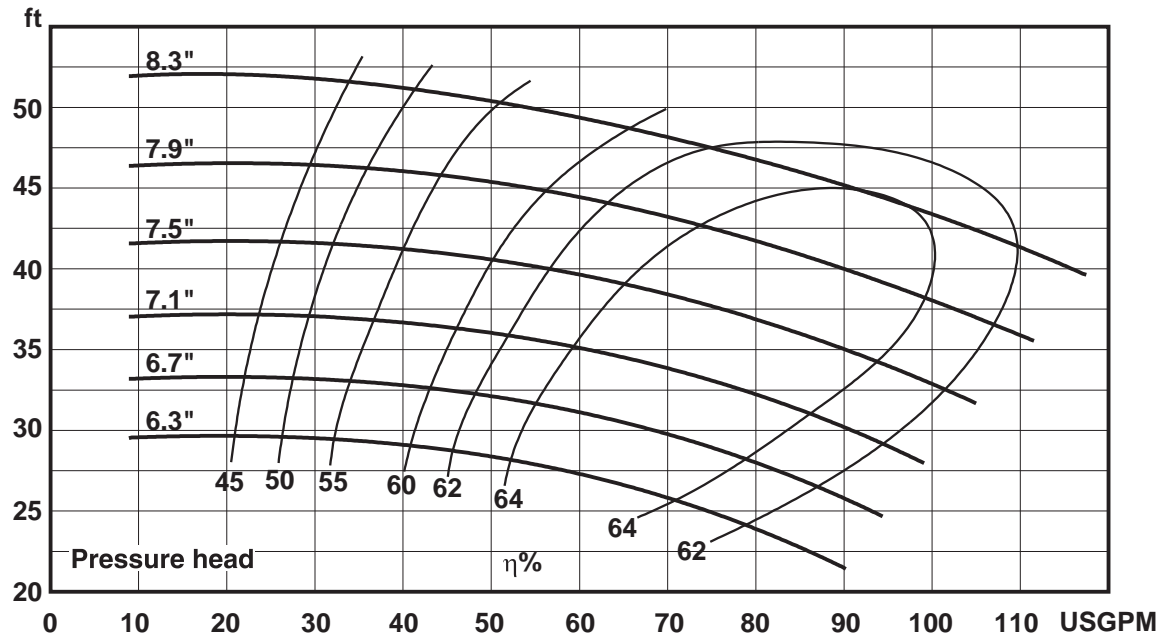




W+ SERIES MODEL W+55/35 CENTRIFUGAL PUMP CAPACITY CURVE
2.5" INLET - 1.5" OUTLET, 2900 RPM, 50 Hz

NOTE: _____

Impeller dia: Max: 8.3"
Performance data refer to water at 68°F
Permissible tolerance ± 5%

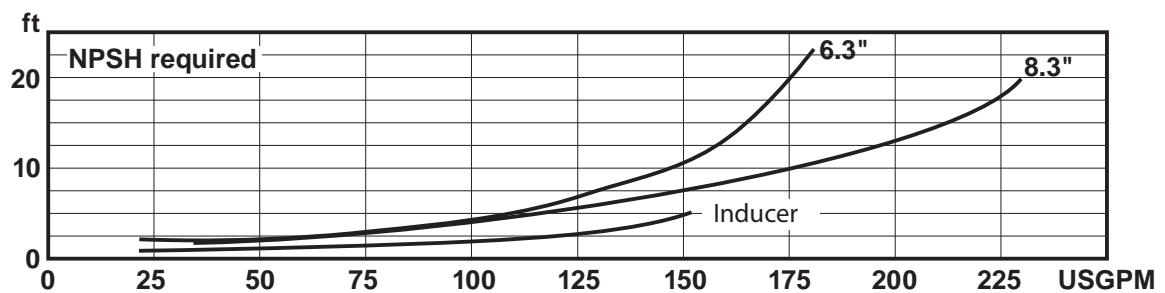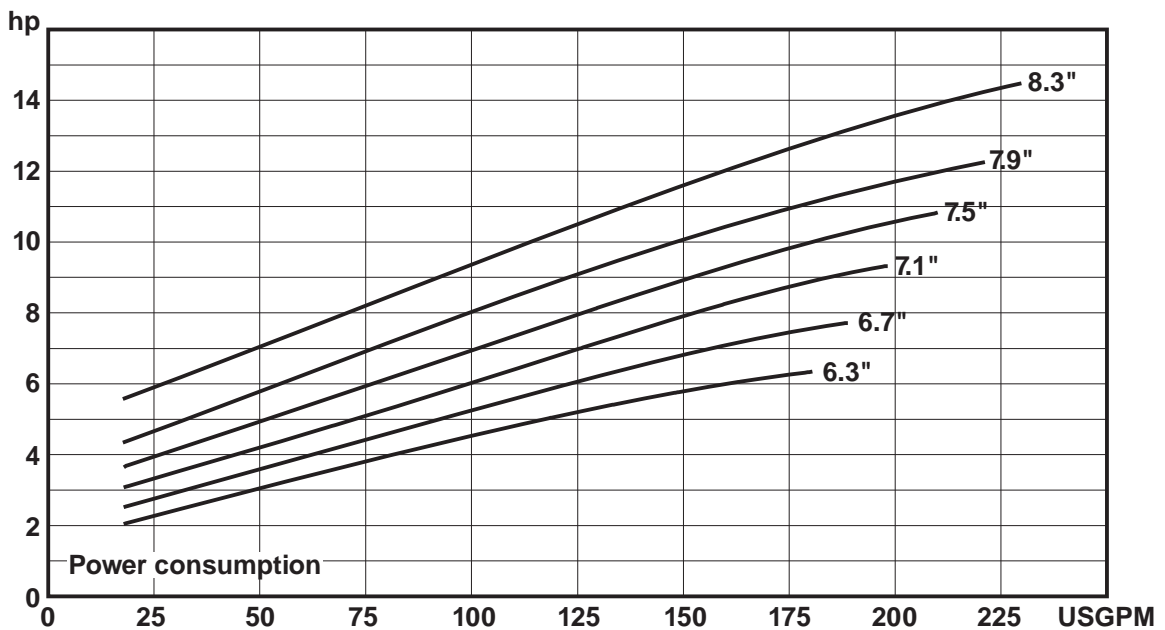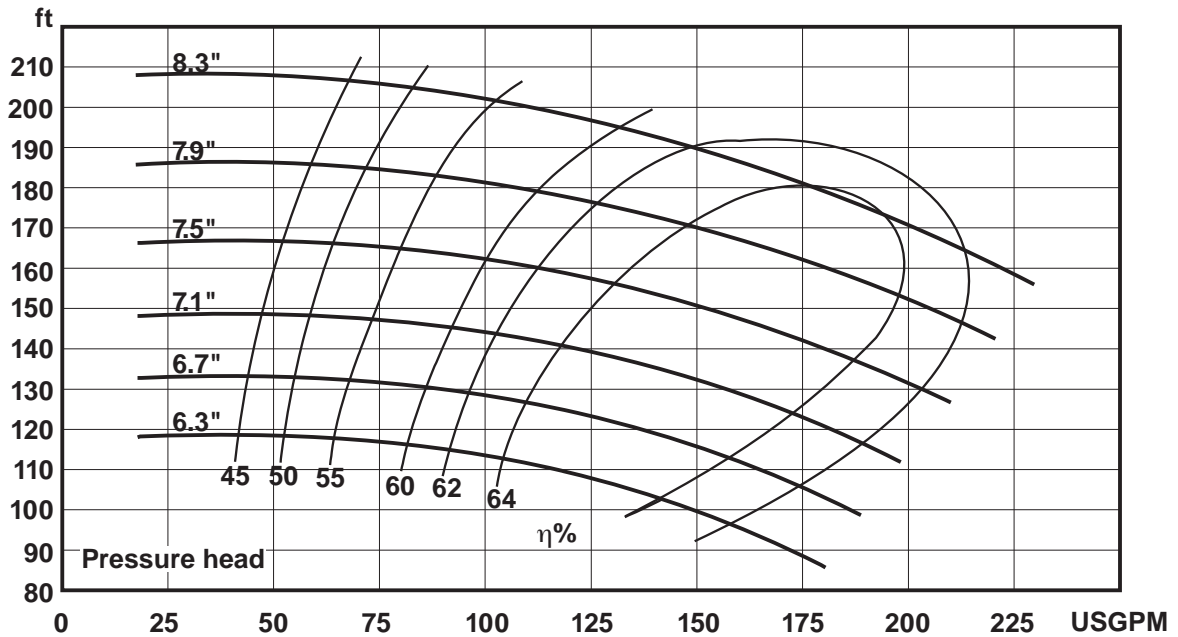




W+ SERIES MODEL W+55/60 CENTRIFUGAL PUMP CAPACITY CURVE
3" INLET - 2" OUTLET, 1450 RPM, 50 Hz

NOTE: _____

Impeller dia: Max: 8.7"
Performance data refer to water at 68°F
Permissible tolerance ± 5%



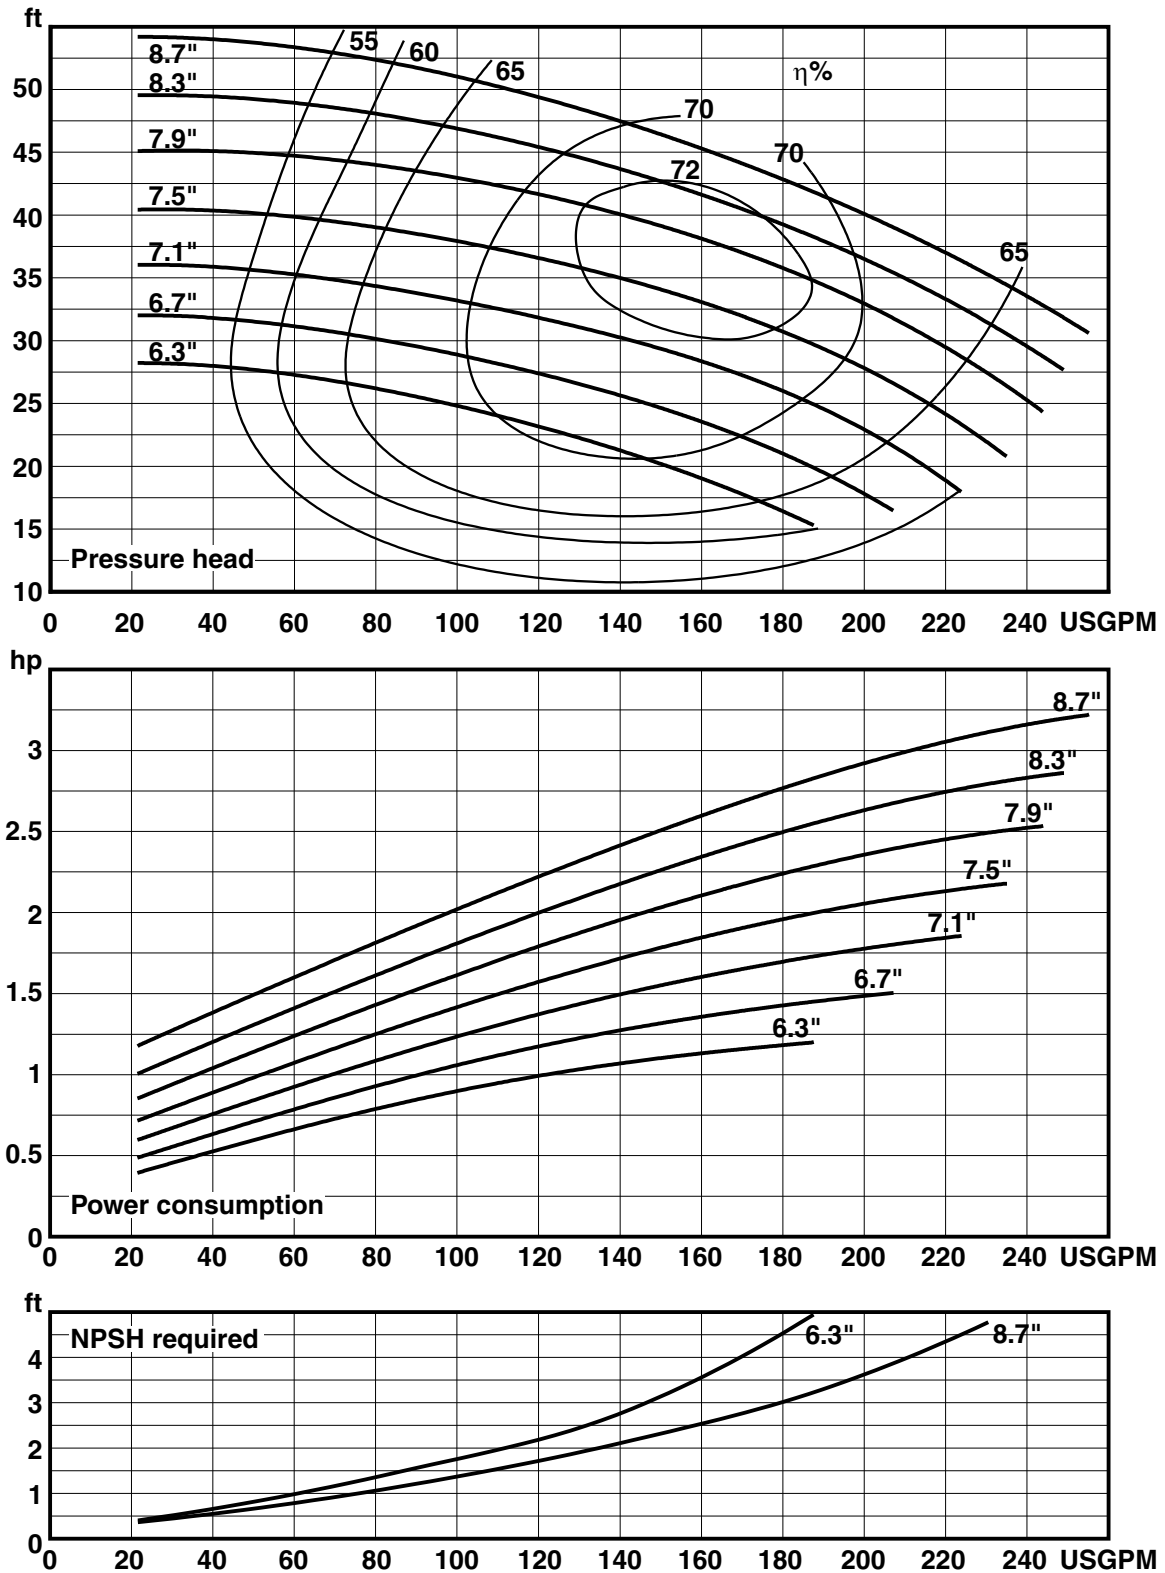




W+ SERIES MODEL W+55/60 CENTRIFUGAL PUMP CAPACITY CURVE
3" INLET - 2" OUTLET, 2900 RPM, 50 Hz

NOTE: _____

Impeller dia: Max: 8.7"
Performance data refer to water at 68°F
Permissible tolerance ± 5%

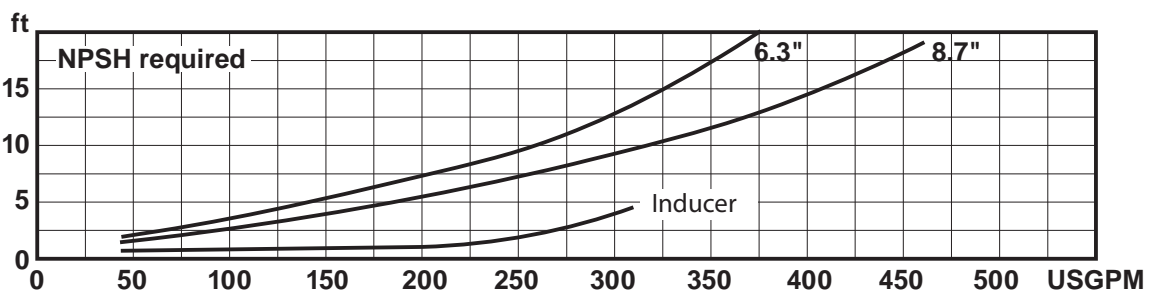
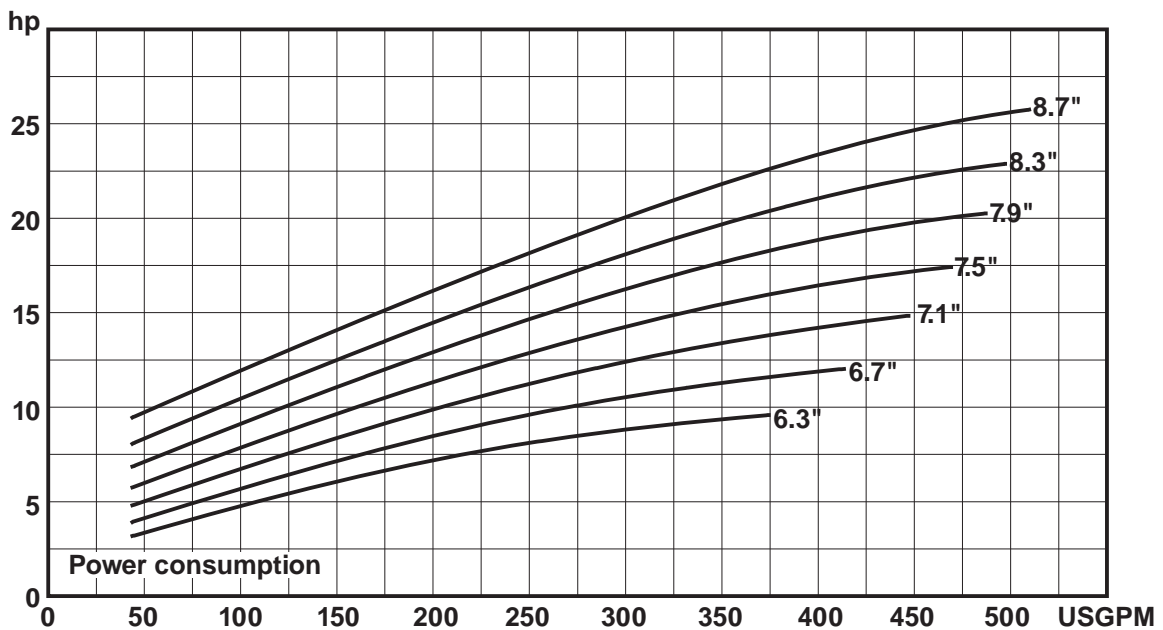
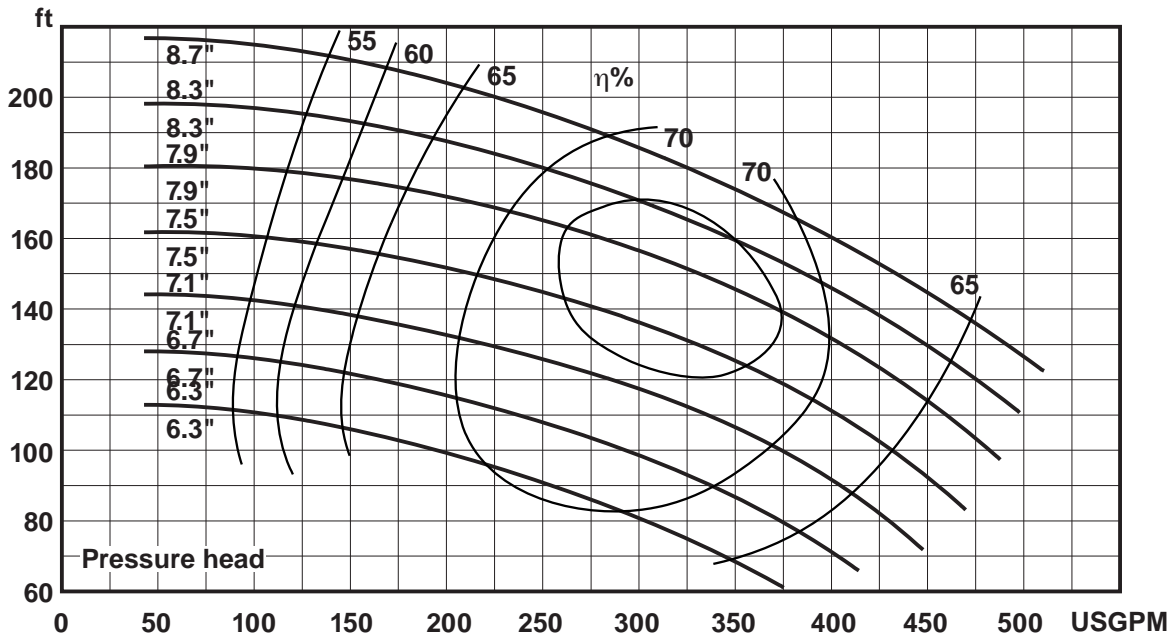




W+ SERIES MODEL W+60/110 CENTRIFUGAL PUMP CAPACITY CURVE
4" INLET - 3" OUTLET, 1450 RPM, 50 Hz

NOTE: _____

Impeller dia: Max: 9.1"
Performance data refer to water at 68°F
Permissible tolerance ± 5%

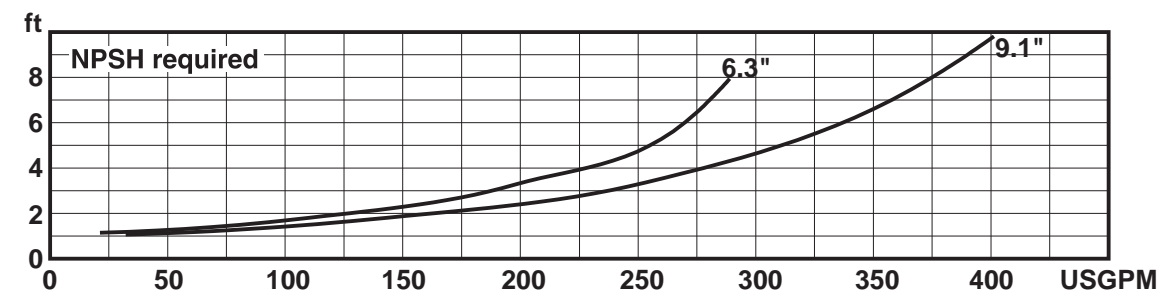
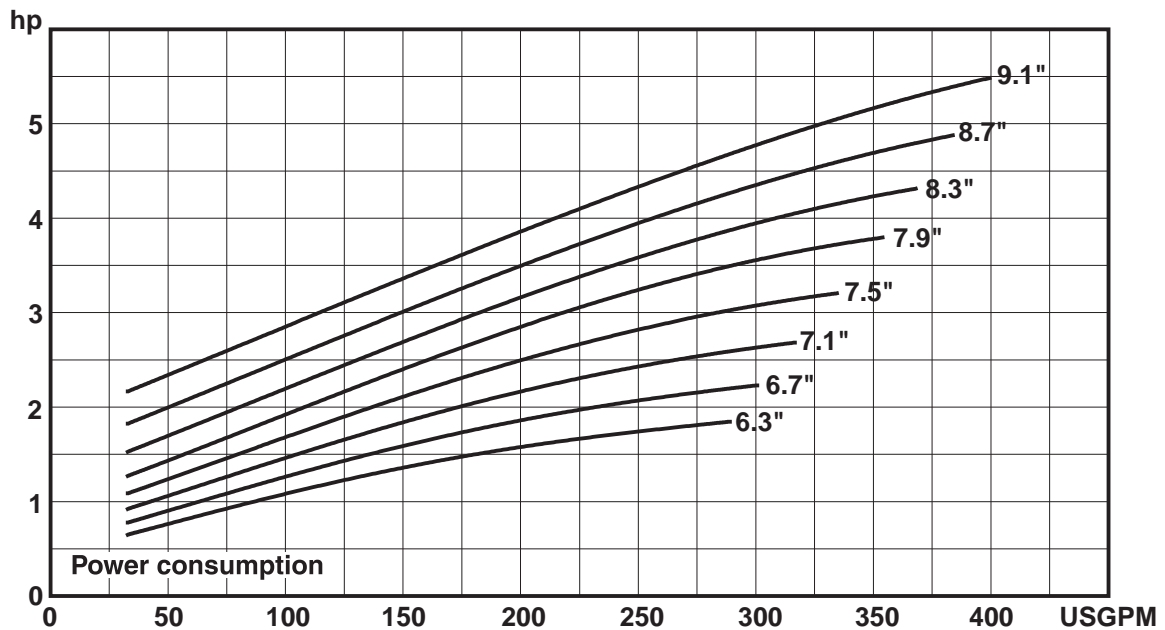
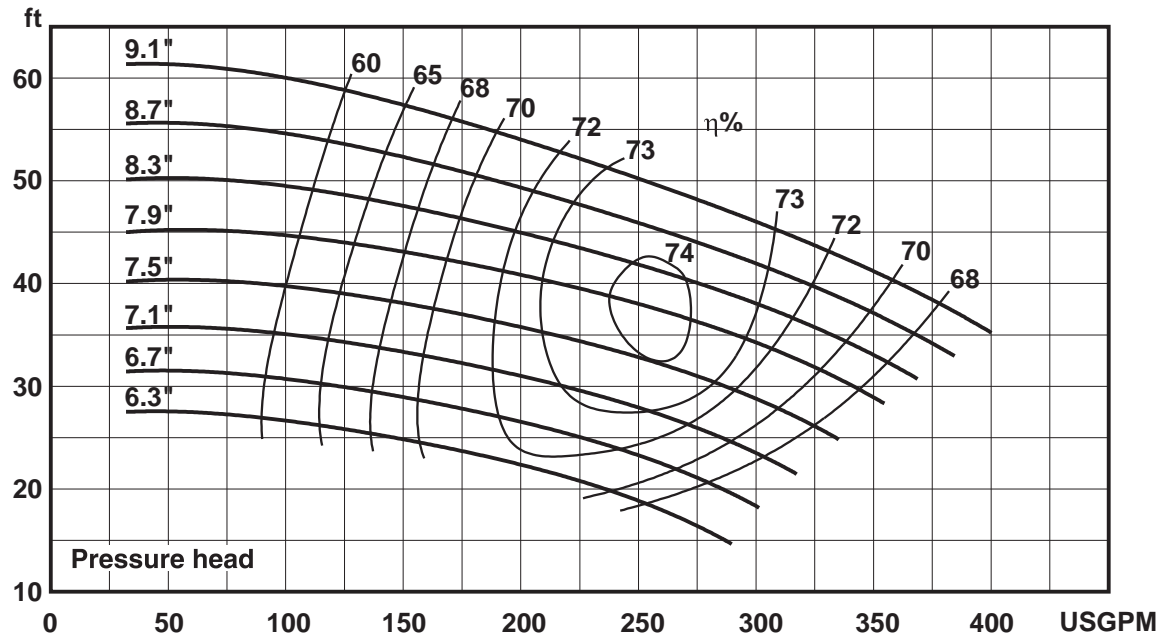




W+ SERIES MODEL W+60/110 CENTRIFUGAL PUMP CAPACITY CURVE
4" INLET - 3" OUTLET, 2900 RPM, 50 Hz

NOTE: _____

Impeller dia: Max: 9.1"
Performance data refer to water at 68°F
Permissible tolerance ± 5%

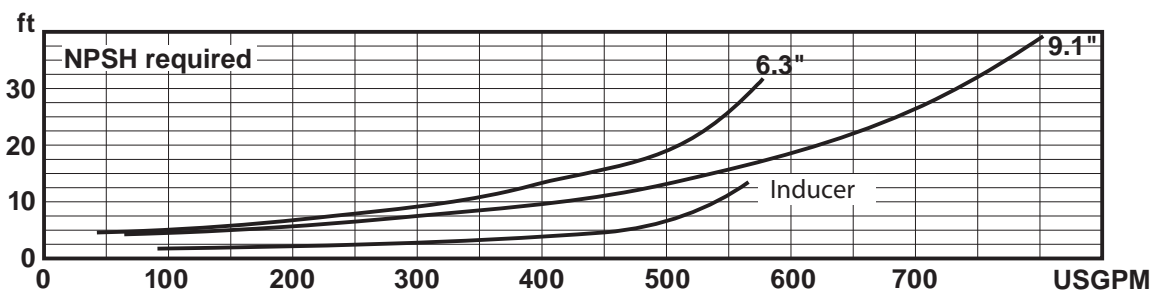
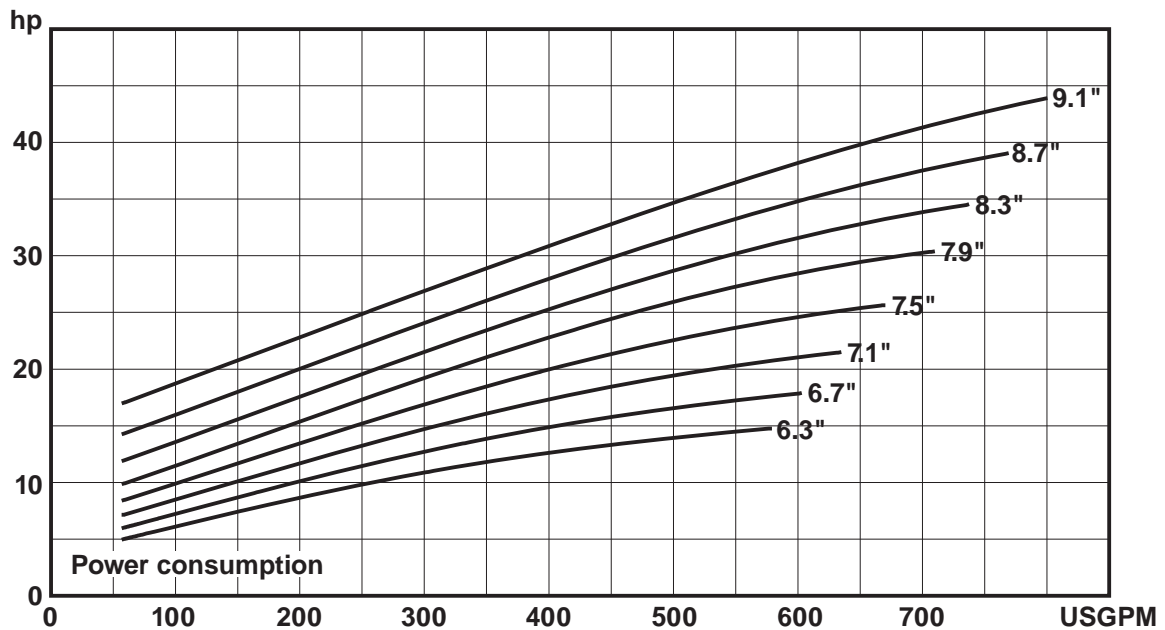
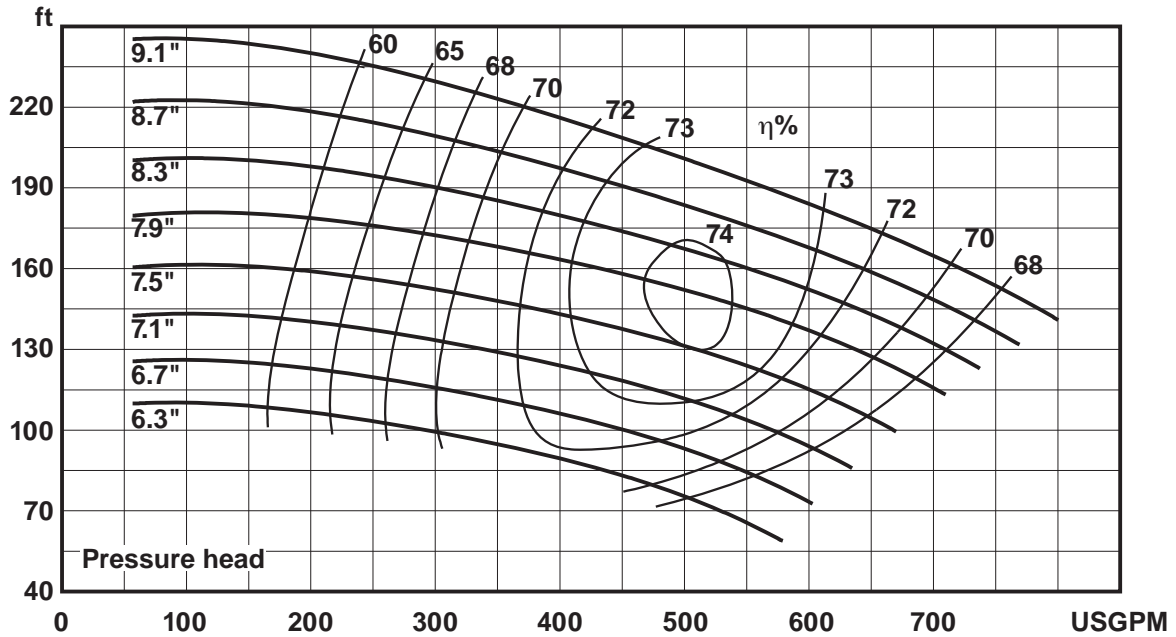




W+ SERIES MODEL W+65/350 CENTRIFUGAL PUMP CAPACITY CURVE
6" INLET - 4" OUTLET, 1450 RPM, 50 Hz

NOTE: _____

Impeller dia: Max: 10.2"
Performance data refer to water at 68°F
Permissible tolerance ± 5%

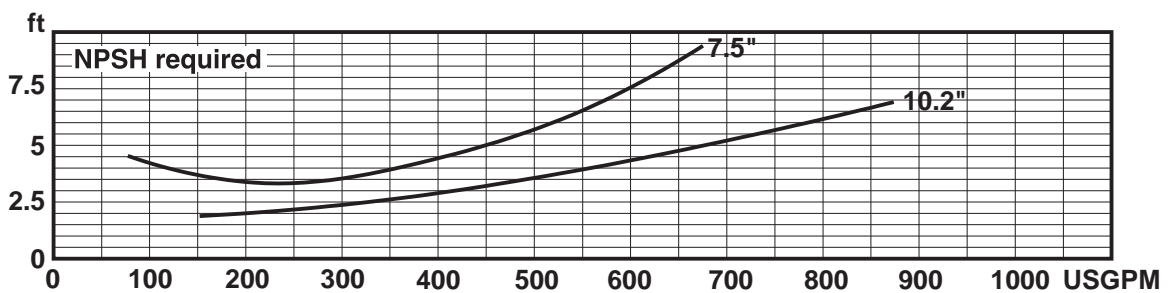
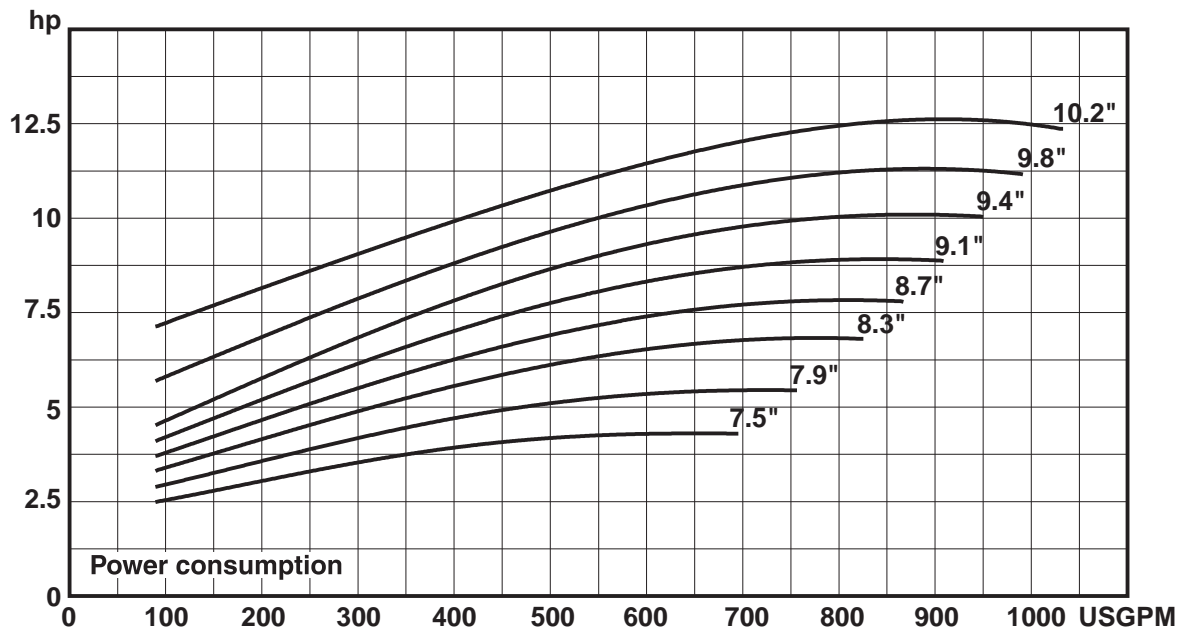
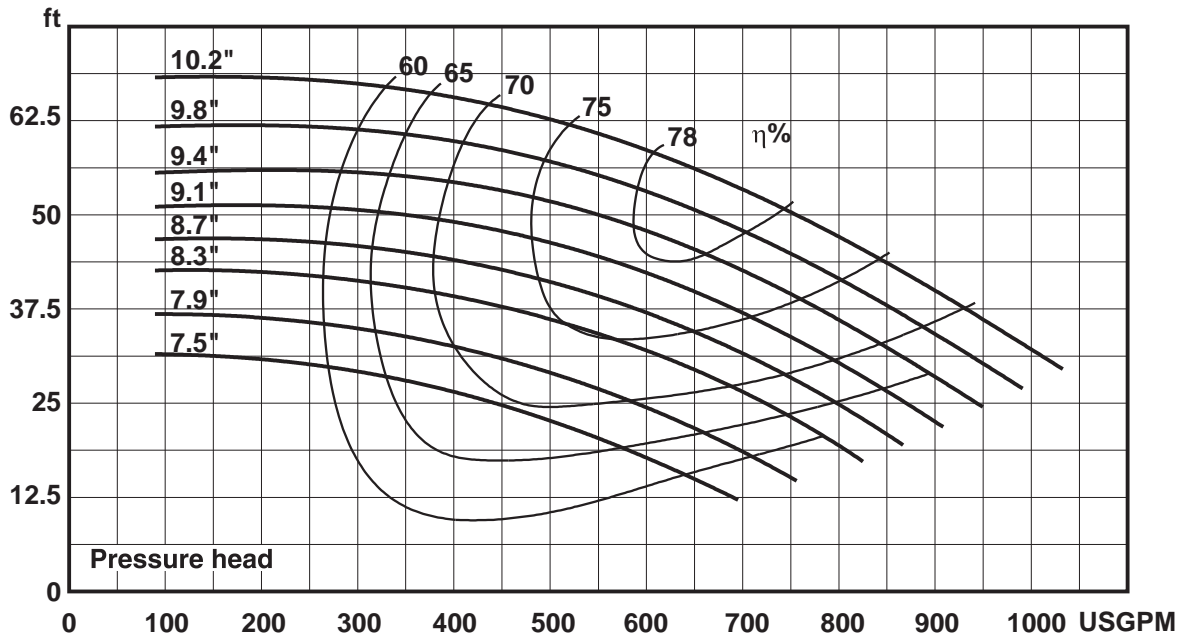




W+ SERIES MODEL W+65/350 CENTRIFUGAL PUMP CAPACITY CURVE
6" INLET - 4" OUTLET, 2900 RPM, 50 Hz

NOTE: _____

Impeller dia: Max: 10.2"
Performance data refer to water at 68°F
Permissible tolerance ± 5%

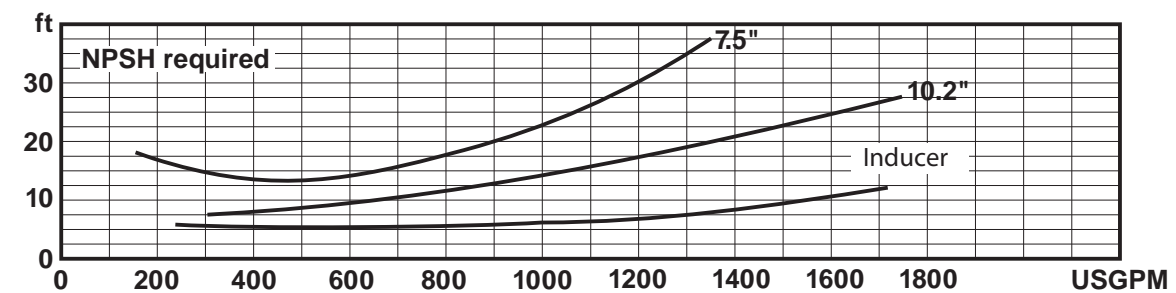
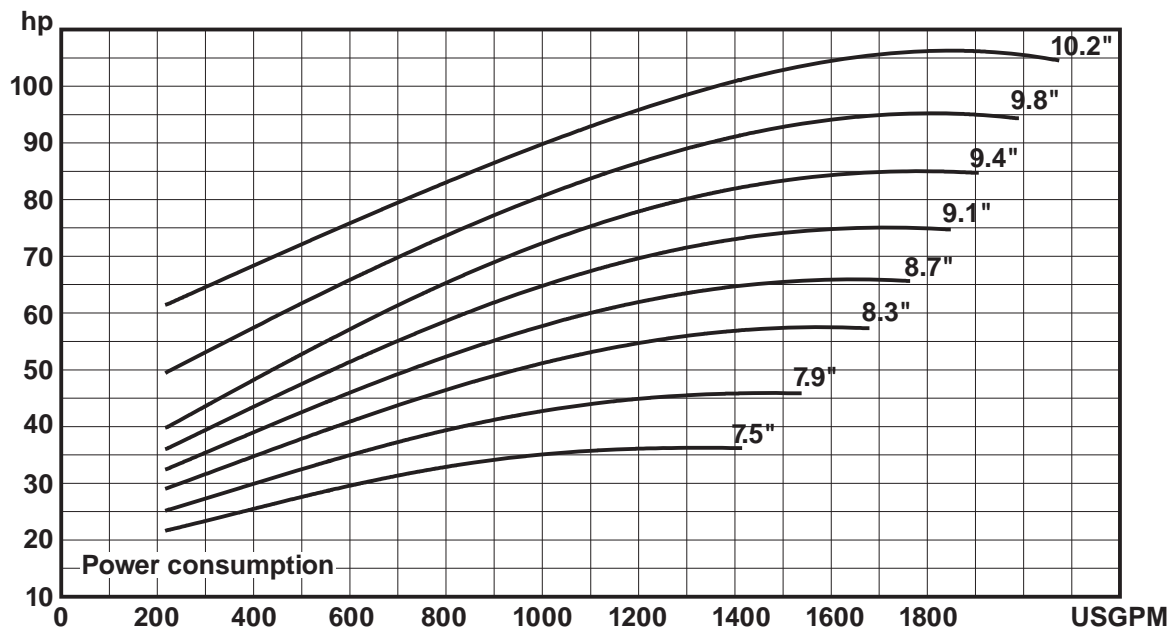
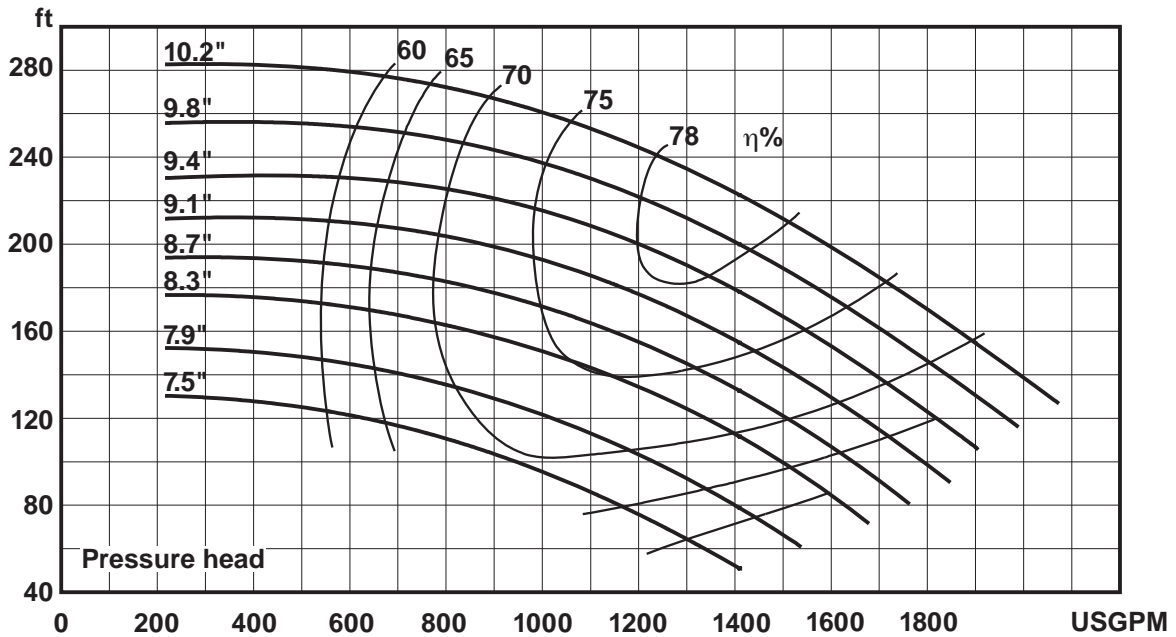




W+ SERIES MODEL W+70/40 CENTRIFUGAL PUMP CAPACITY CURVE
2.5" INLET - 1.5" OUTLET, 1450 RPM, 50 Hz

NOTE: _____

Impeller dia: Max: 9.4"
Performance data refer to water at 68°F
Permissible tolerance ± 5%

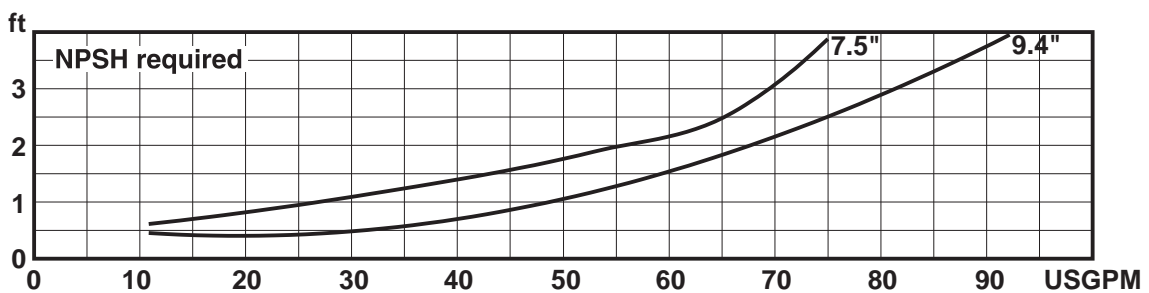
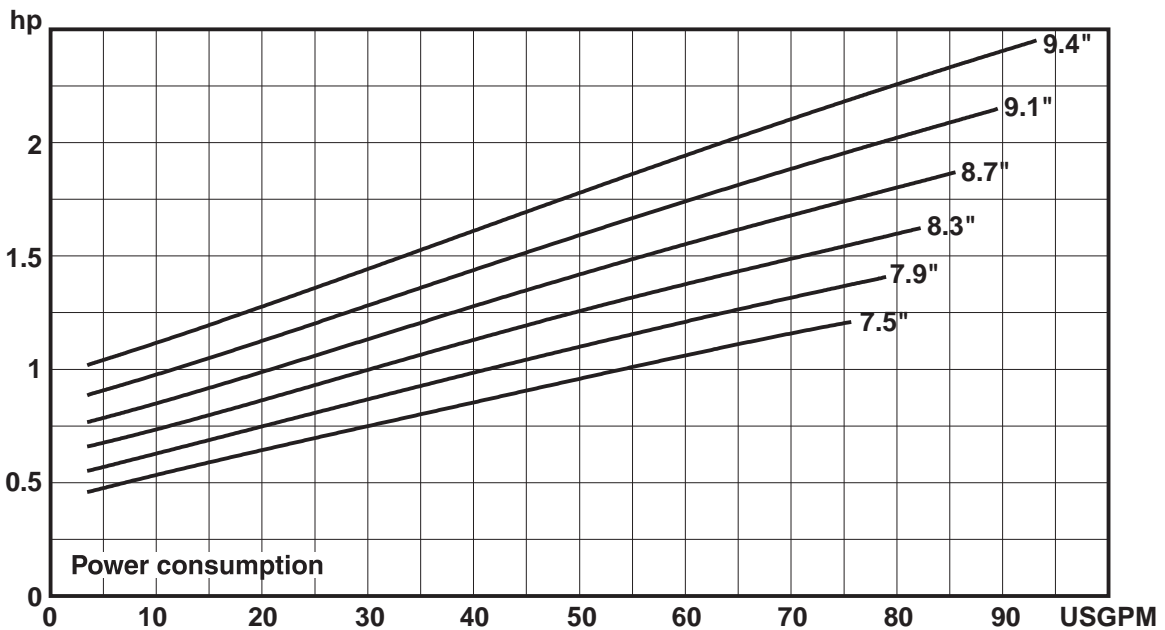
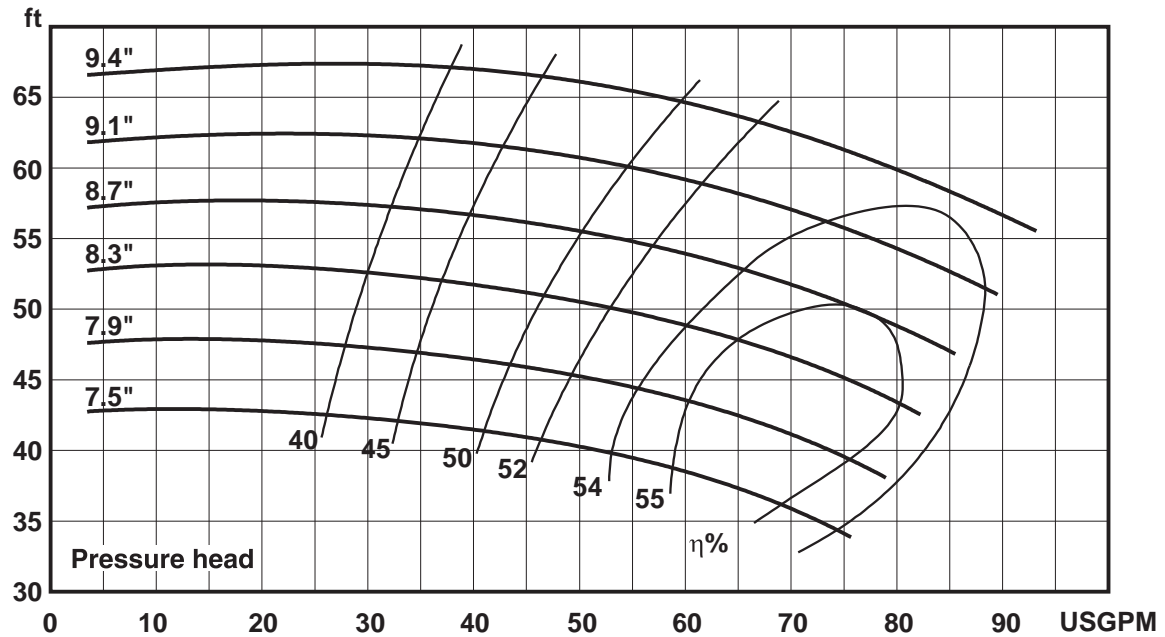




**W+ SERIES MODEL W+70/40 CENTRIFUGAL PUMP CAPACITY CURVE
2.5" INLET - 1.5" OUTLET, 2900 RPM, 50 Hz**

NOTE: _____

Impeller dia: Max: 9.4"
Performance data refer to water at 68°F
Permissible tolerance ± 5%

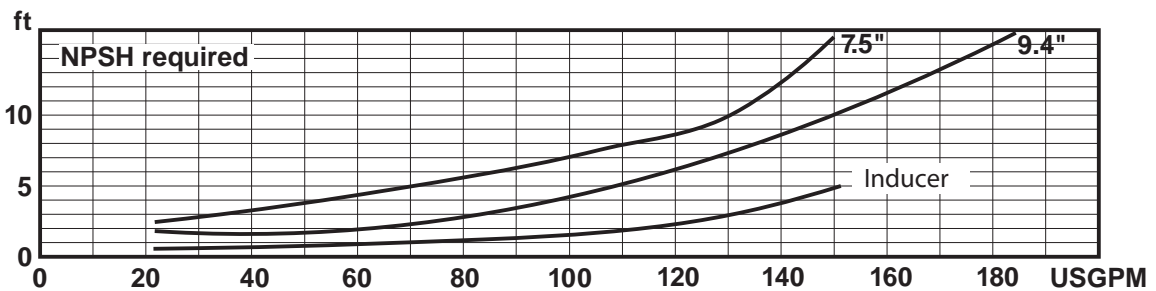
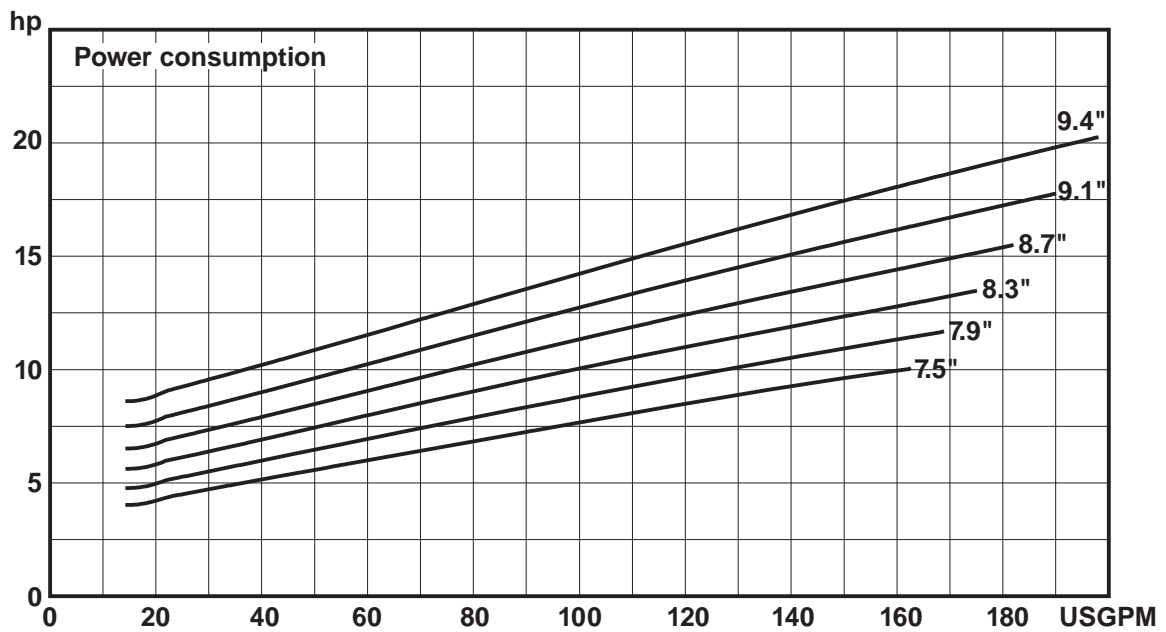
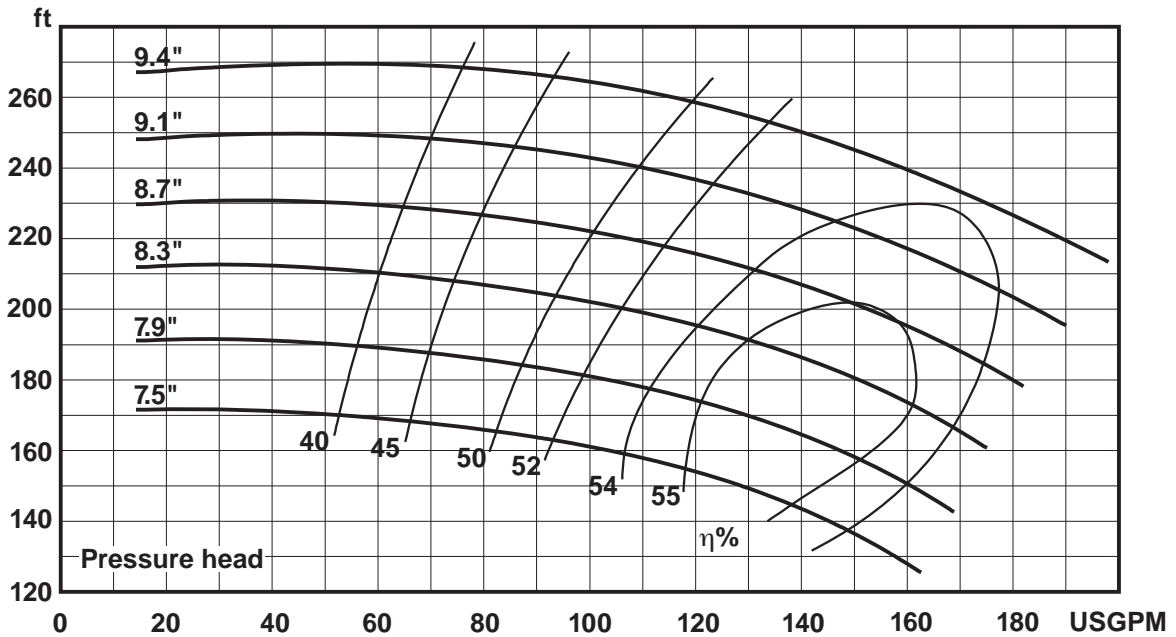




W+ SERIES MODEL W+80/80 CENTRIFUGAL PUMP CAPACITY CURVE
3" INLET - 2" OUTLET, 1450 RPM, 50 Hz

NOTE: _____

Impeller dia: Max: 10.0"
Performance data refer to water at 68°F
Permissible tolerance ± 5%

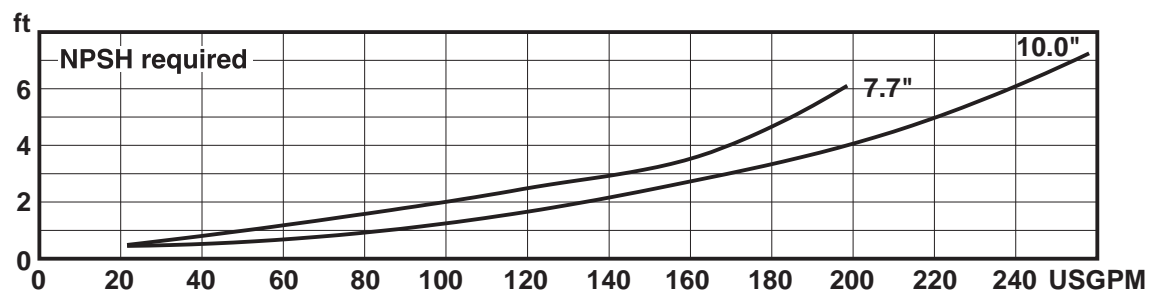
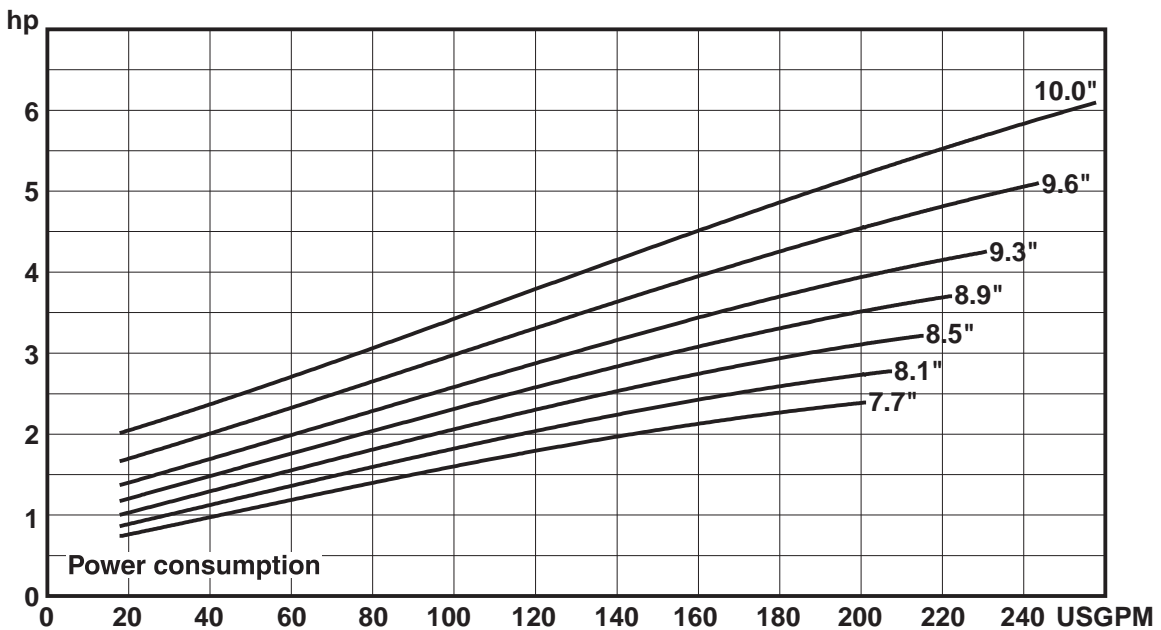
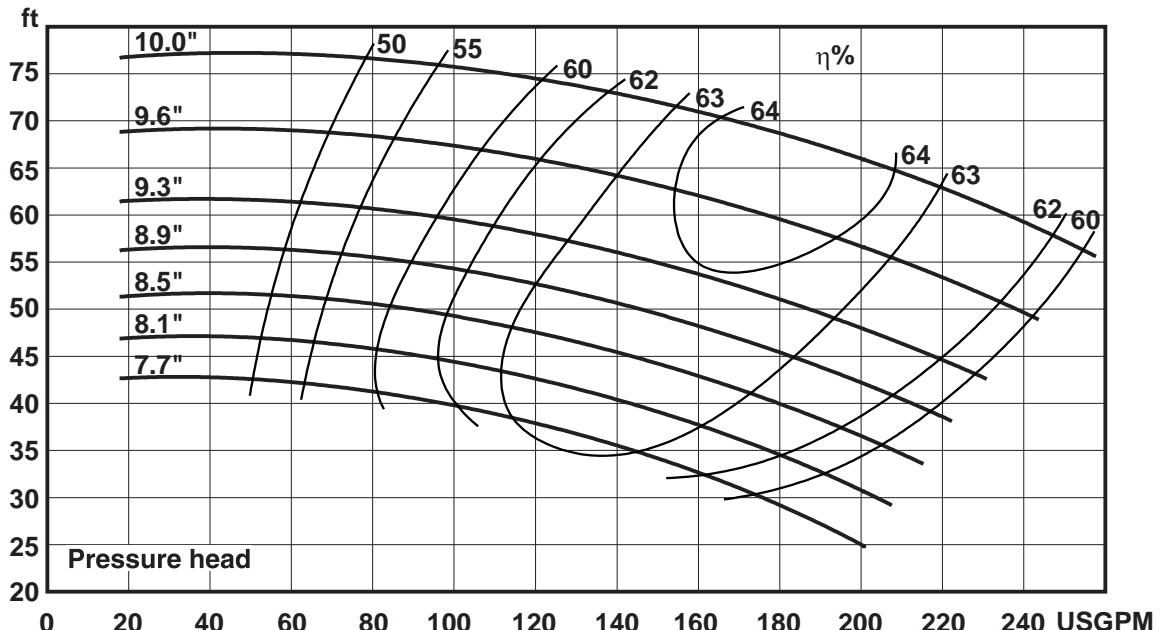




W+ SERIES MODEL W+80/80 CENTRIFUGAL PUMP CAPACITY CURVE
3" INLET - 2" OUTLET, 2900 RPM, 50 Hz

NOTE: _____

Impeller dia: Max: 10.0"
Performance data refer to water at 68°F
Permissible tolerance ± 5%

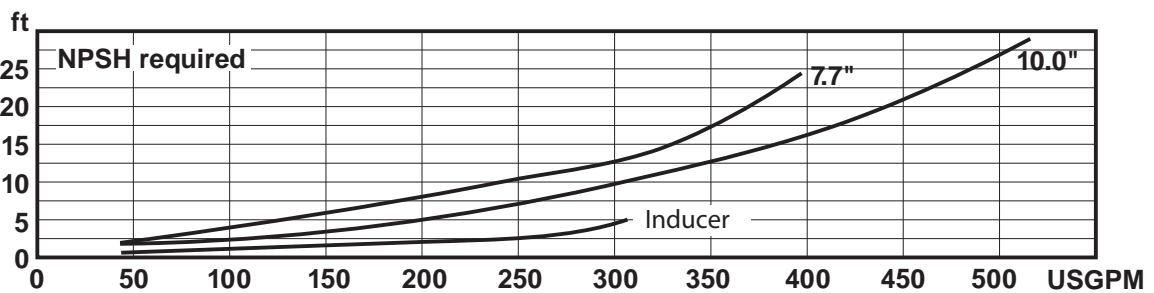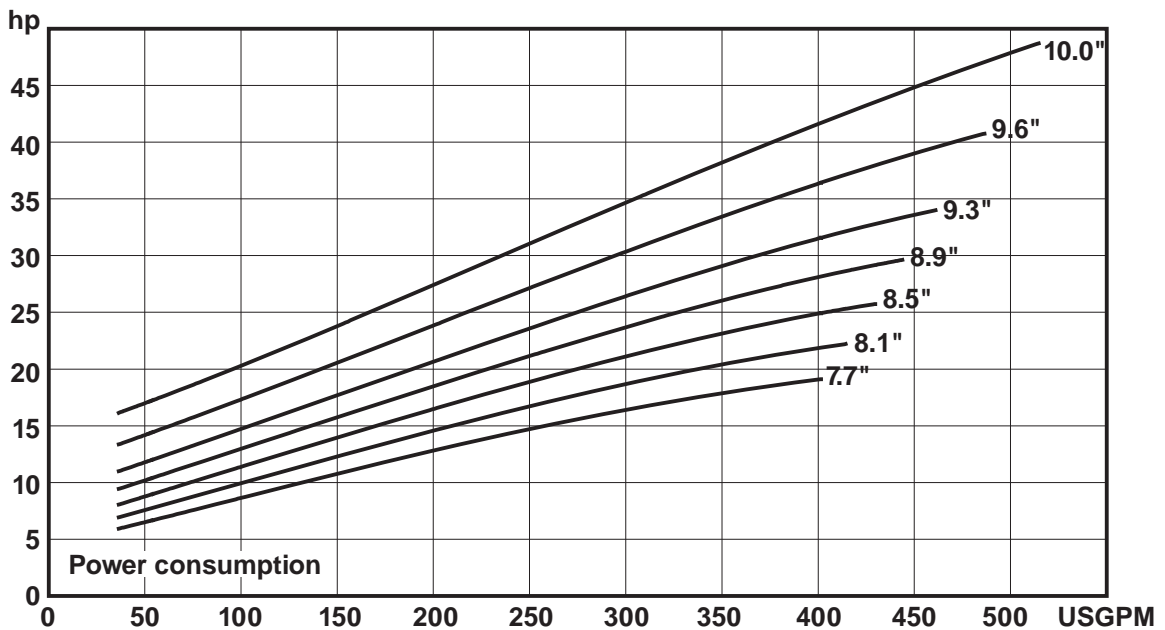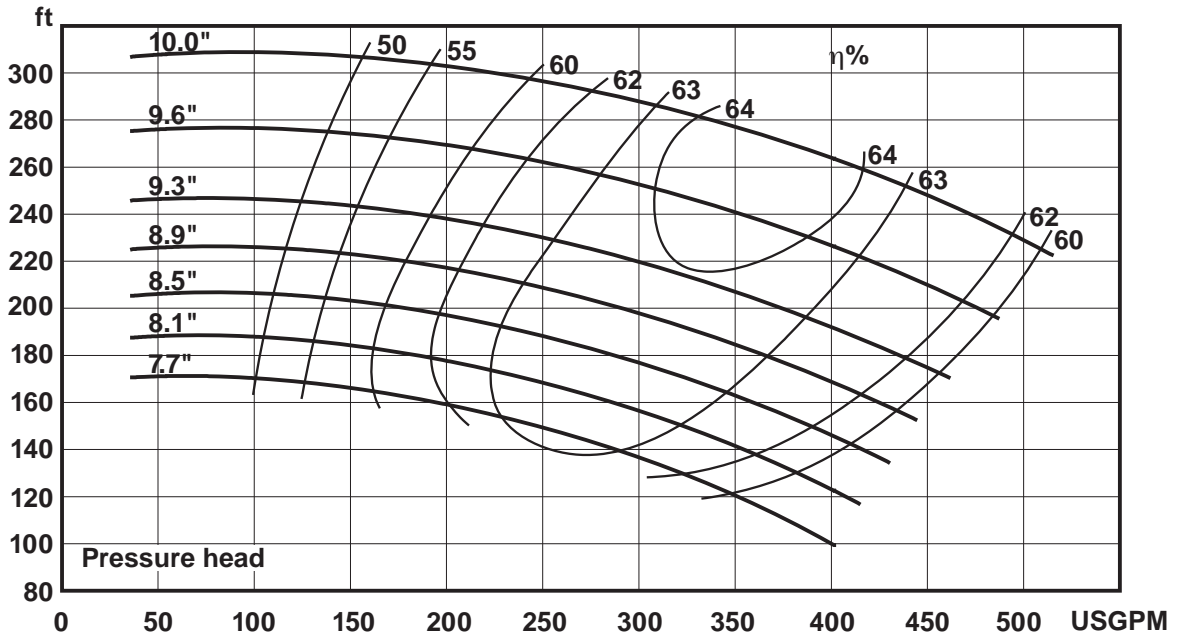




W+ SERIES MODEL W+110/130 CENTRIFUGAL PUMP CAPACITY CURVE
4" INLET - 3" OUTLET, 1450 RPM, 50 Hz

NOTE: _____

Impeller dia: Max: 11.4"
Performance data refer to water at 68°F
Permissible tolerance ± 5%



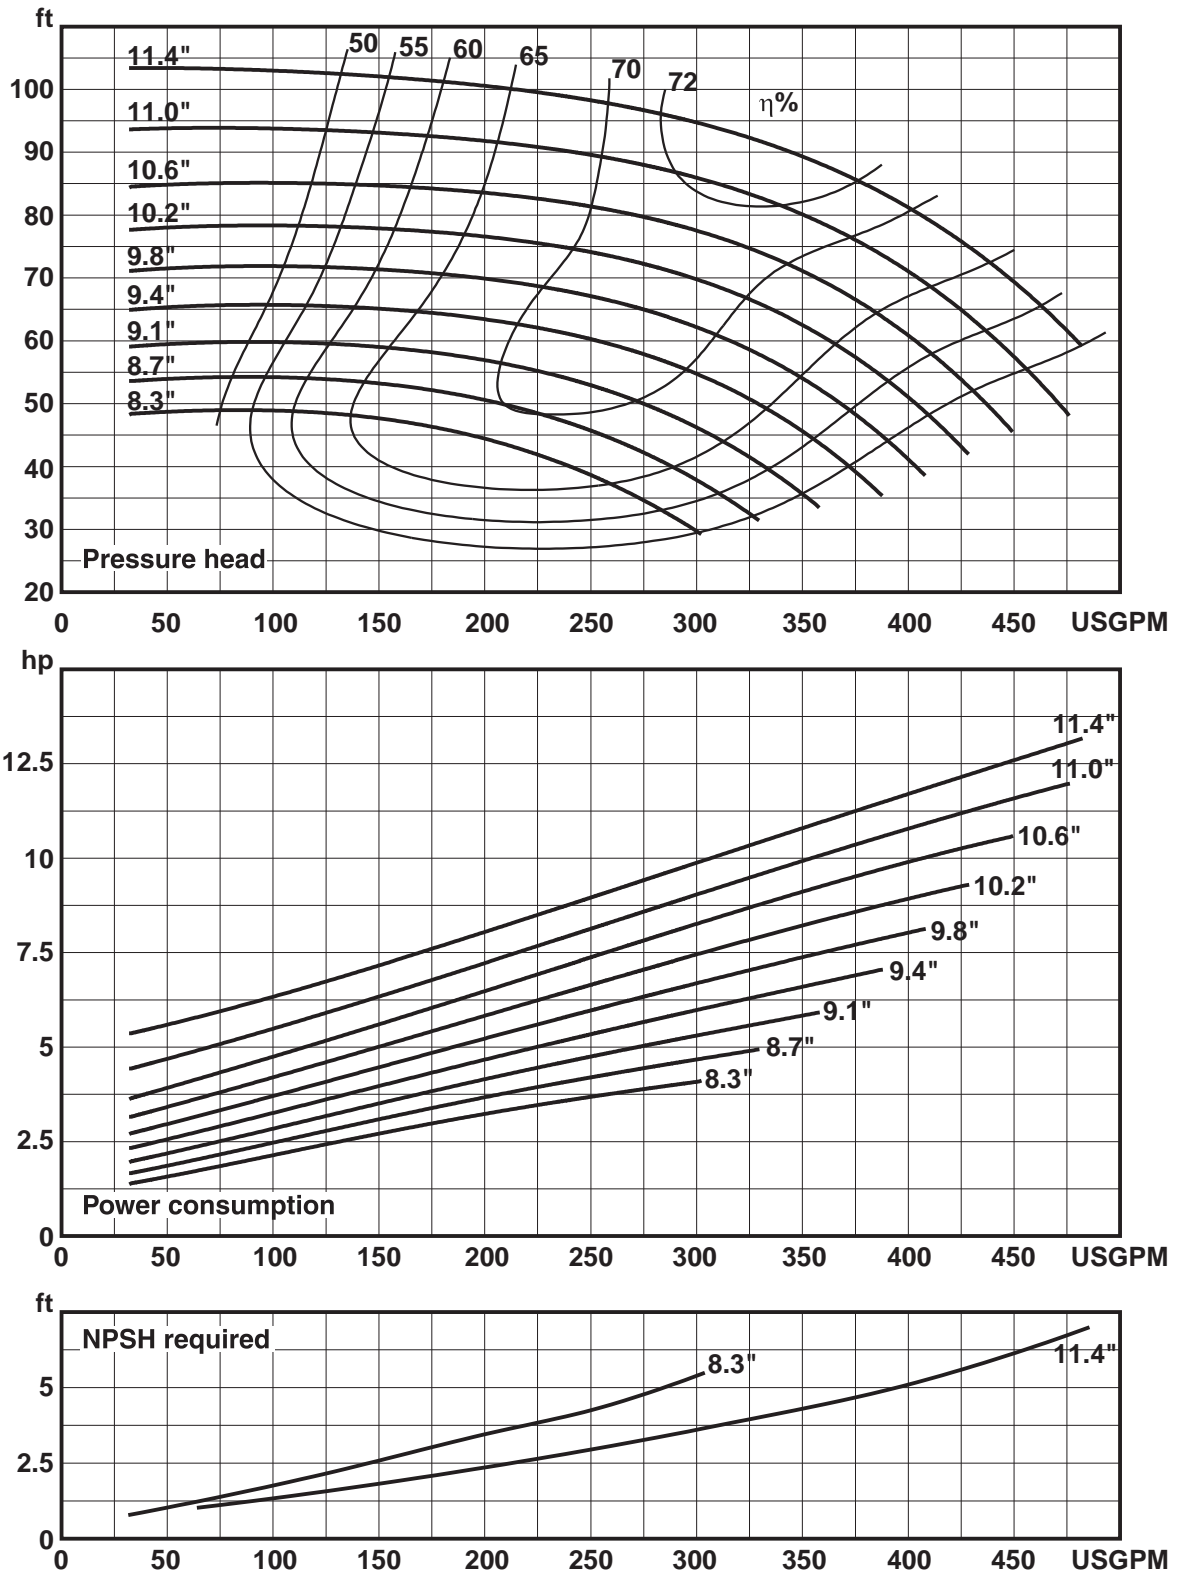




W+ SERIES MODEL W+110/130 CENTRIFUGAL PUMP CAPACITY CURVE
4" INLET - 3" OUTLET, 2900 RPM, 50 Hz

NOTE: _____

Impeller dia: Max: 11.4"
Performance data refer to water at 68°F
Permissible tolerance ± 5%

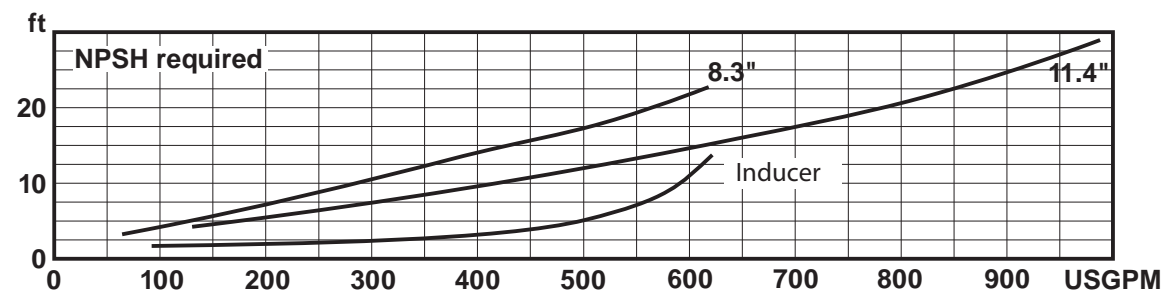
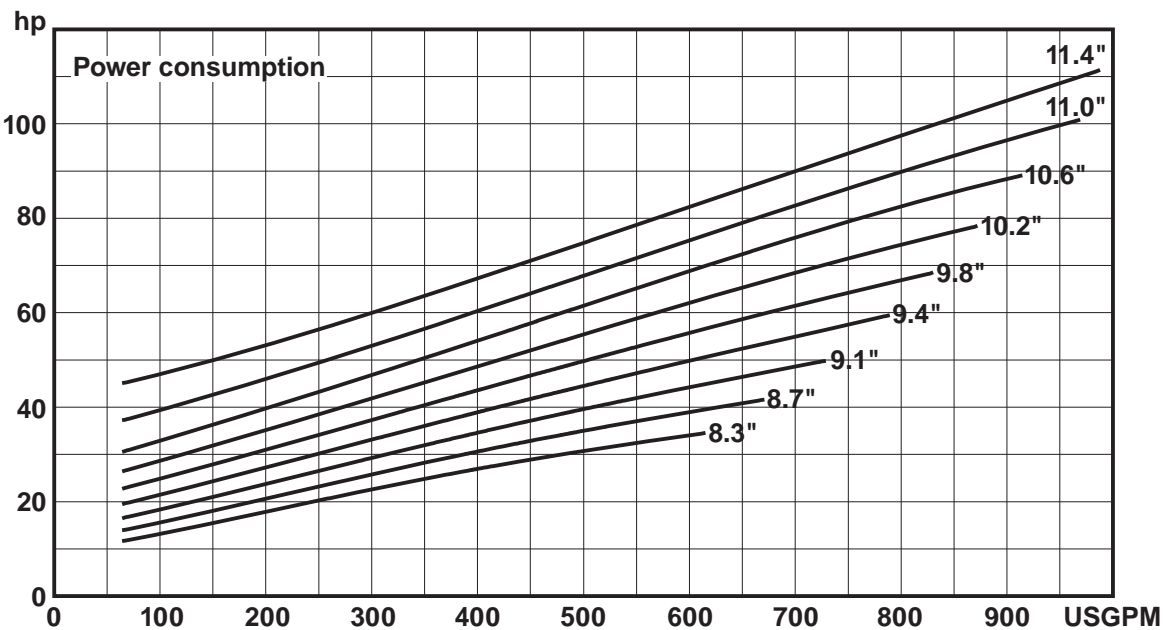
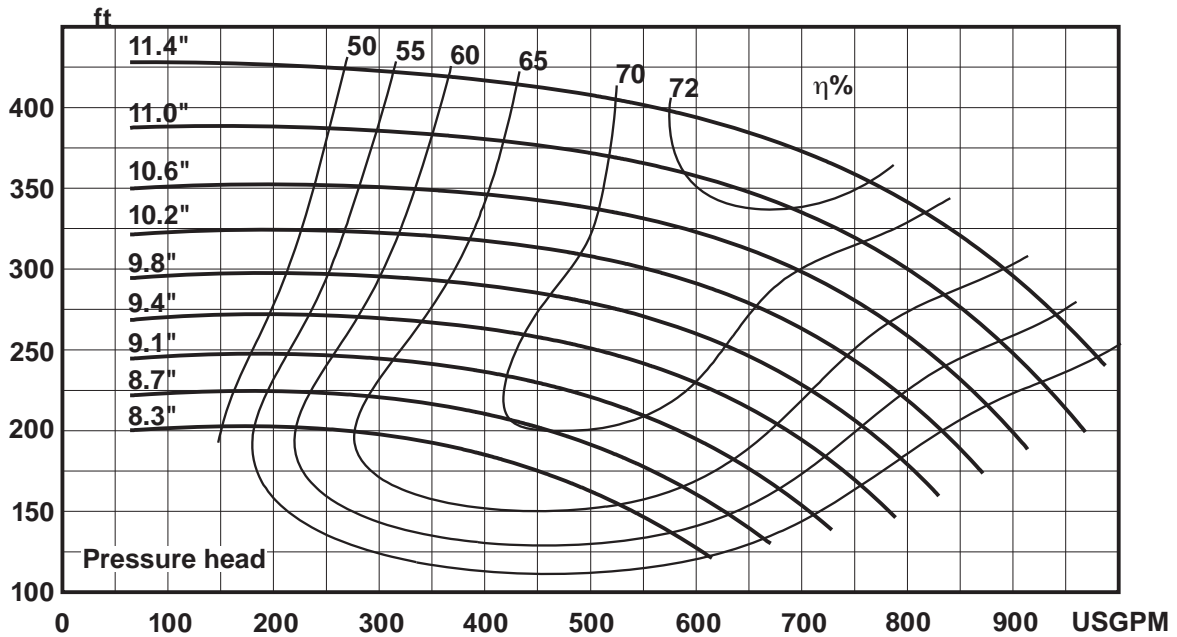




W+ SERIES MODEL W+140/50 2-STAGES CENTRIFUGAL PUMP CAPACITY CURVE
3" INLET - 2" OUTLET, 2950 RPM, 50 Hz

NOTE: _____

Impeller dia: Max: 7.9"
Performance data refer to water at 68°F
Permissible tolerance $\pm 5\%$

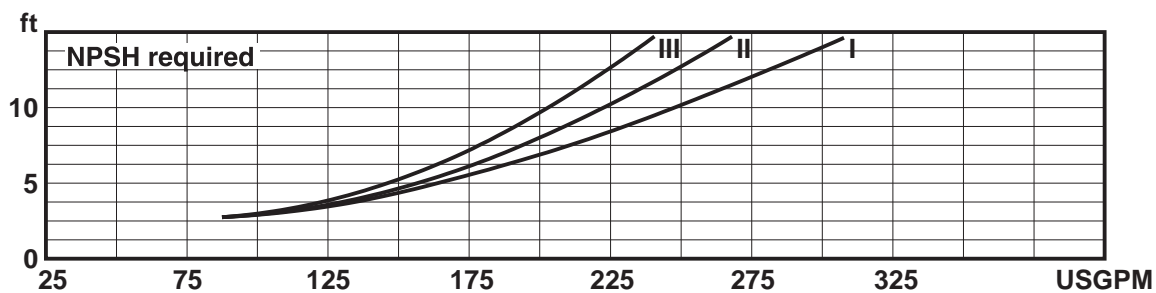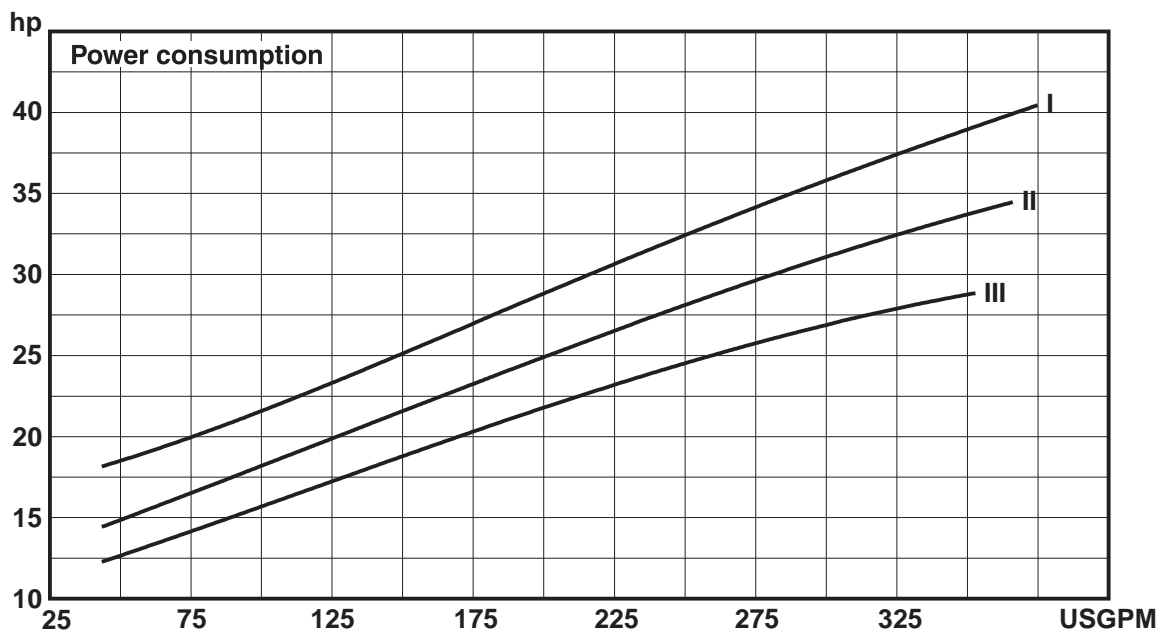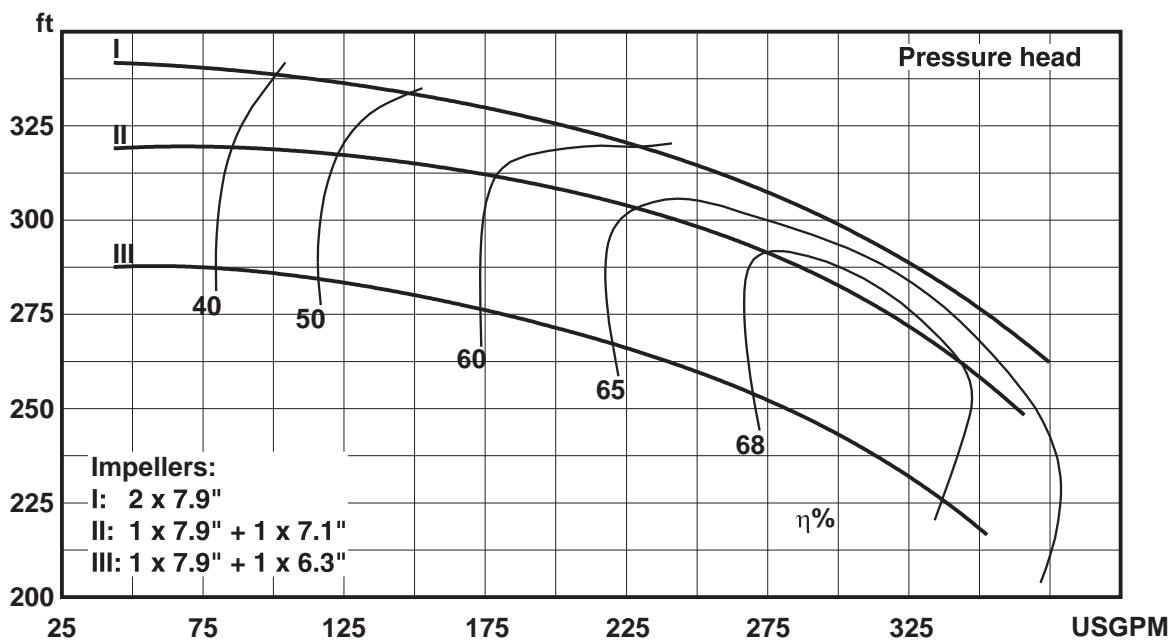




W+ SERIES MODEL W+140/50 3-STAGES CENTRIFUGAL PUMP CAPACITY CURVE
3" INLET - 2" OUTLET, 2950 RPM, 50 Hz

NOTE: _____

Impeller dia: Max: 7.9"
Performance data refer to water at 68°F
Permissible tolerance ± 5%

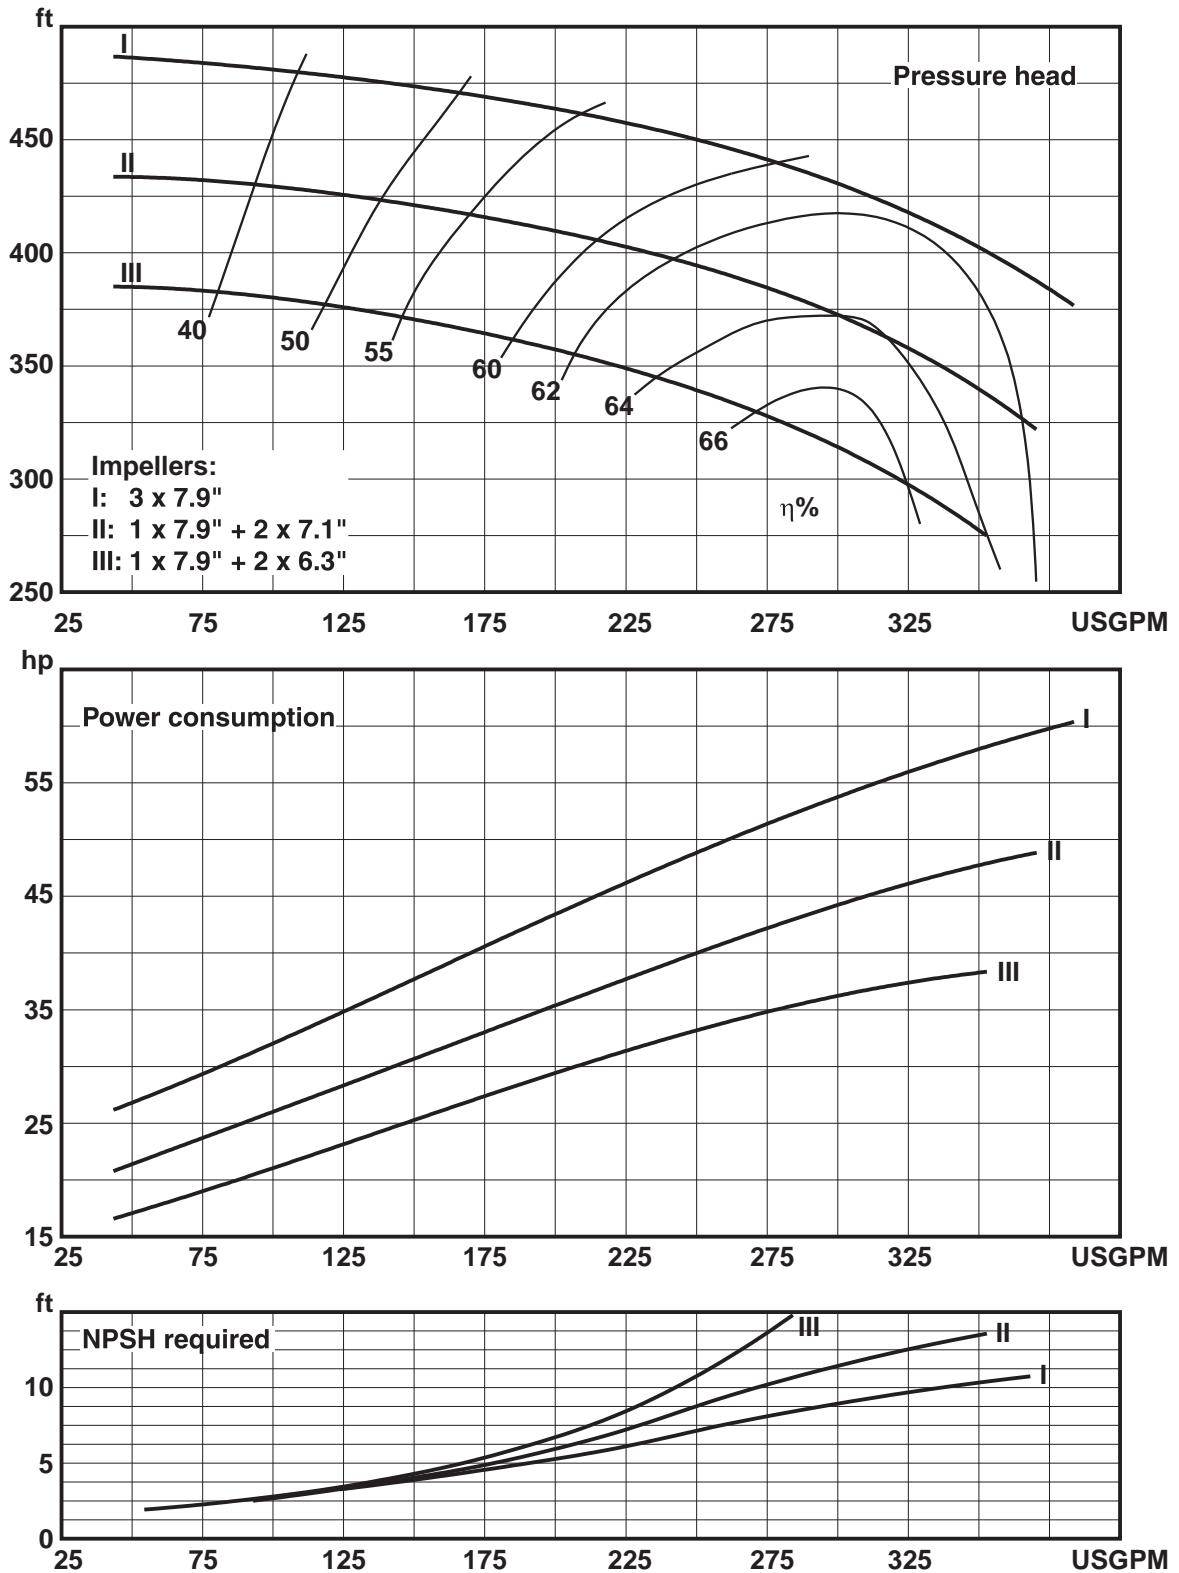

Sanitary Centrifugal Pumps

W+ SERIES

- 50HZ CURVE BOOK

SPXFLOW

Based in Charlotte, North Carolina, SPX FLOW, Inc. (NYSE: FLOW) is a multi-industry manufacturing leader. For more information, please visit www.spxflow.com

SPX FLOW

611 Sugar Creek Road

Delavan, WI 53115

P: (262) 728-1900 or (800) 252-5200

E: answers.us@spxflow.com

SPX FLOW, Inc. reserves the right to incorporate our latest design and material changes without notice or obligation.

Design features, materials of construction and dimensional data, as described in this bulletin, are provided for your information only and should not be relied upon unless confirmed in writing. Please contact your local sales representative for product availability in your region. For more information visit www.spxflow.com.

The green "s" and "x" are trademarks of SPX FLOW, Inc.

ISSUED 06/2017 7019-01-06-2010-GB

COPYRIGHT © 2017 SPX FLOW, Inc.